

TSP-5645-22

21.5" Panel PC



Key Highlights

- 21.5" LCD Touchscreen
- Slim and Fanless Design
- Intel 8th Gen Core i3/i5 Processor
- Windows 11 Capabilities
- IP66/IP69K Stainless Steel Front Bezel

[VIEW ONLINE](#)

The TSP-5645-22 stands out as the perfect computing solution for industries operating in liquid-exposed environments, such as food and beverage manufacturing. Its large 22" display provides ample screen real estate for improved visibility and enhanced productivity during critical operations. The panel mount capability allows for easy integration into existing setups, creating a waterproof solution that safeguards against the challenge posed by liquids and sprays. Reinforced by its stainless steel front bezel, the TSP-5645 achieved an impressive IP66/IP69K rating, ensuring optimal protection and durability. This [panel PC](#) also delivers reliable performance through its powerful Intel 8th Gen Core i3/i5 processor and Windows 11 capabilities.

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Technical Specifications

Primary Components

Processor Family	Intel Core I series 8th Generation Whiskey Lake-U
Processor Model	Core i3 8145UE, Core i5-8365UE
Processor Speed	1.6 GHz, Up to 4.1 GHz
Memory Type	1x DDR4 SO-DIMM
Memory Support	4GB, 8GB, 16GB, 32GB
Storage Type	1x M.2 M Key, PCIe or SATA, 2242 default or 2280
Storage Support	128GB-1TB

Power

Input Voltage Range	9-36V DC
Max Power Consumption	74W
Standard Power Adapter	Optional 19V 6.3A AC/DC Adapter

Operating Systems

Windows	Windows 10 IoT, Windows 10 Pro, Windows 11 IoT, Windows 11 Pro
---------	--

Expansion Slots

Internal M.2	1x M.2 for NVME SSD Support
--------------	-----------------------------

Enclosure

Material	Aluminum, Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66 Front Bezel, IP69K Front Bezel
Color	Silver, Stainless Steel
Mounting Options	Panel Mount, VESA 100 Mount
Approved Cleaning Solutions	Acetic Acid (low concentration), Ammonium Nitrate (low concentration), Benzine, Citric Acid (low concentration), Ethanol, Ethylene Glycol Solution (1:1 with water), Hexane, Hydrochloric Acid (low concentration), Iron Chloride Solution, Isooctane, Isopropyl Alcohol, Nitric Acid (low concentration), Paraffin, Perhydrol (30% in water), Phosphoric Acid (low concentration), Propane, Silicone Oil, Sodium Carbonate (low concentration), Sodium Chloride Solution, Sodium Nitrate (low concentration), Sulfuric Acid (low concentration), Triethylene Glycol

Weight / Dimensions

Weight	7.8 kg (17.2 lbs)
Dimensions	573.8 x 378.8 x 59.8 mm (22.6 x 14.9 x 2.4 in)

Certification

Certifications	CE, EN 1672-2 Complaint (PCAP Touchscreen Only), FCC Class A
----------------	--

Specifications subject to change.

Display

Screen Size	21.5
Screen Resolution	1920 x 1080 (Full HD)
Screen Ratio	16:9
Brightness	250 nits, Optional 1000 nit High Brightness

Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

External I/O Ports

USB	4x USB 3.0
Serial / Com	2x COM
Serial Protocol Detail	Included Y-Cable provides two DB-9 Com ports: 1x 5-pin RS-232 (COM1) and 1x Configurable 3-Pin RS-232/422/485 (COM2)
Ethernet / LAN	2x RJ45 GbE LAN
Video Outputs	1x DisplayPort
Audio Ports	1x Audio Line-Out
Power Input Port	DC-in Jack (Phoenix Type)

Thermal & Environmental

Operating Temperature	0°C - 50°C (32°F - 122°F)
Storage Temperature	-30°C - 70°C (-22°F - 158°F)
Cooling Solution	Passive - Fanless
Humidity Range	10% - 95% Non-condensing
Storage Humidity	10% - 90% Non-condensing

Peripherals & Wireless Connectivity

WiFi	Optional 802.11 ac + Bluetooth with External Antennas
Bluetooth	Optional Bluetooth 4.0
Sim Card	1x Nano SIM Card Slot

Warranty

Warranty	Up to 5 Years
----------	---------------

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com


EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12, No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

I/O Diagram Images

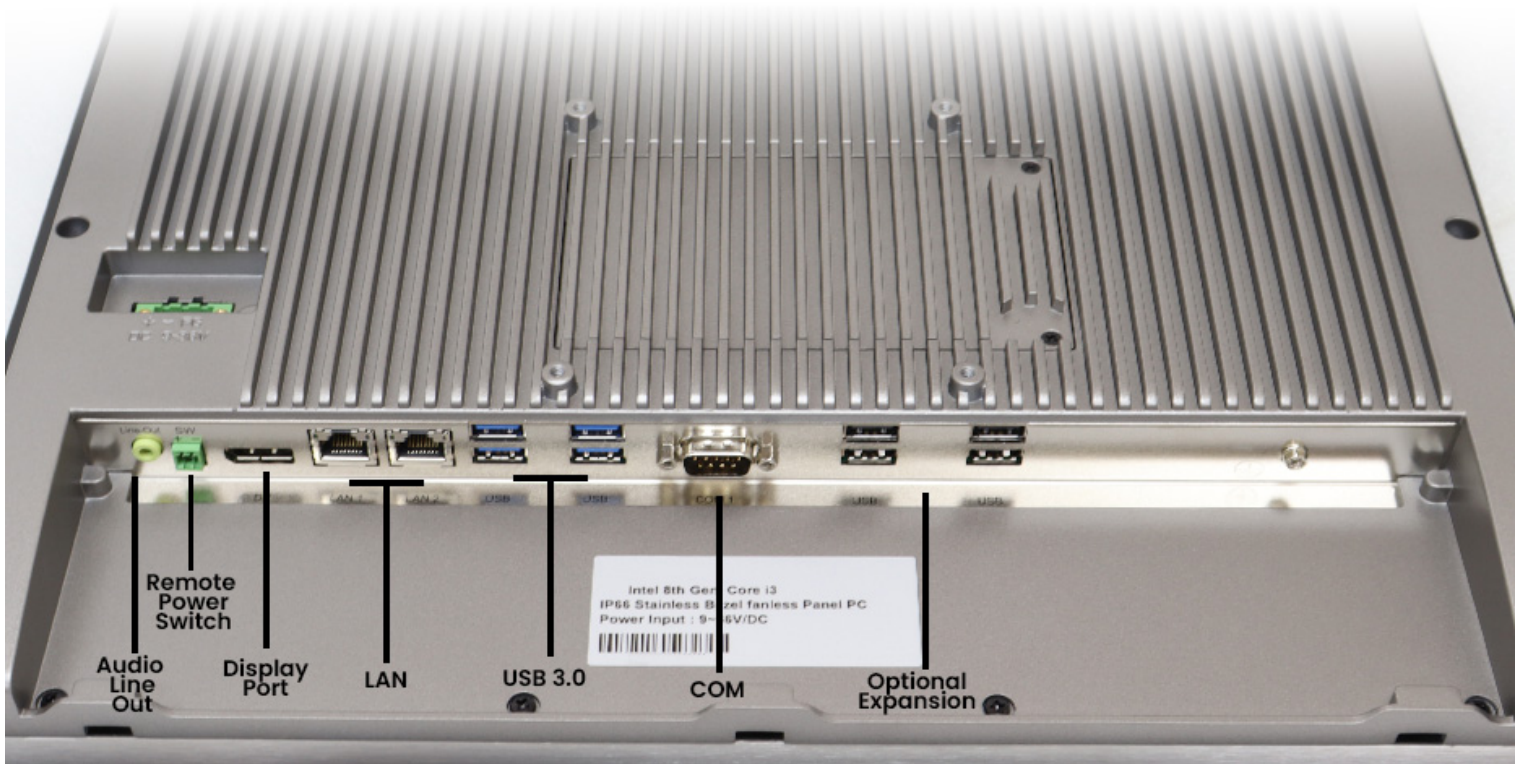


USA
Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE
Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA
Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Tech Diagram Images

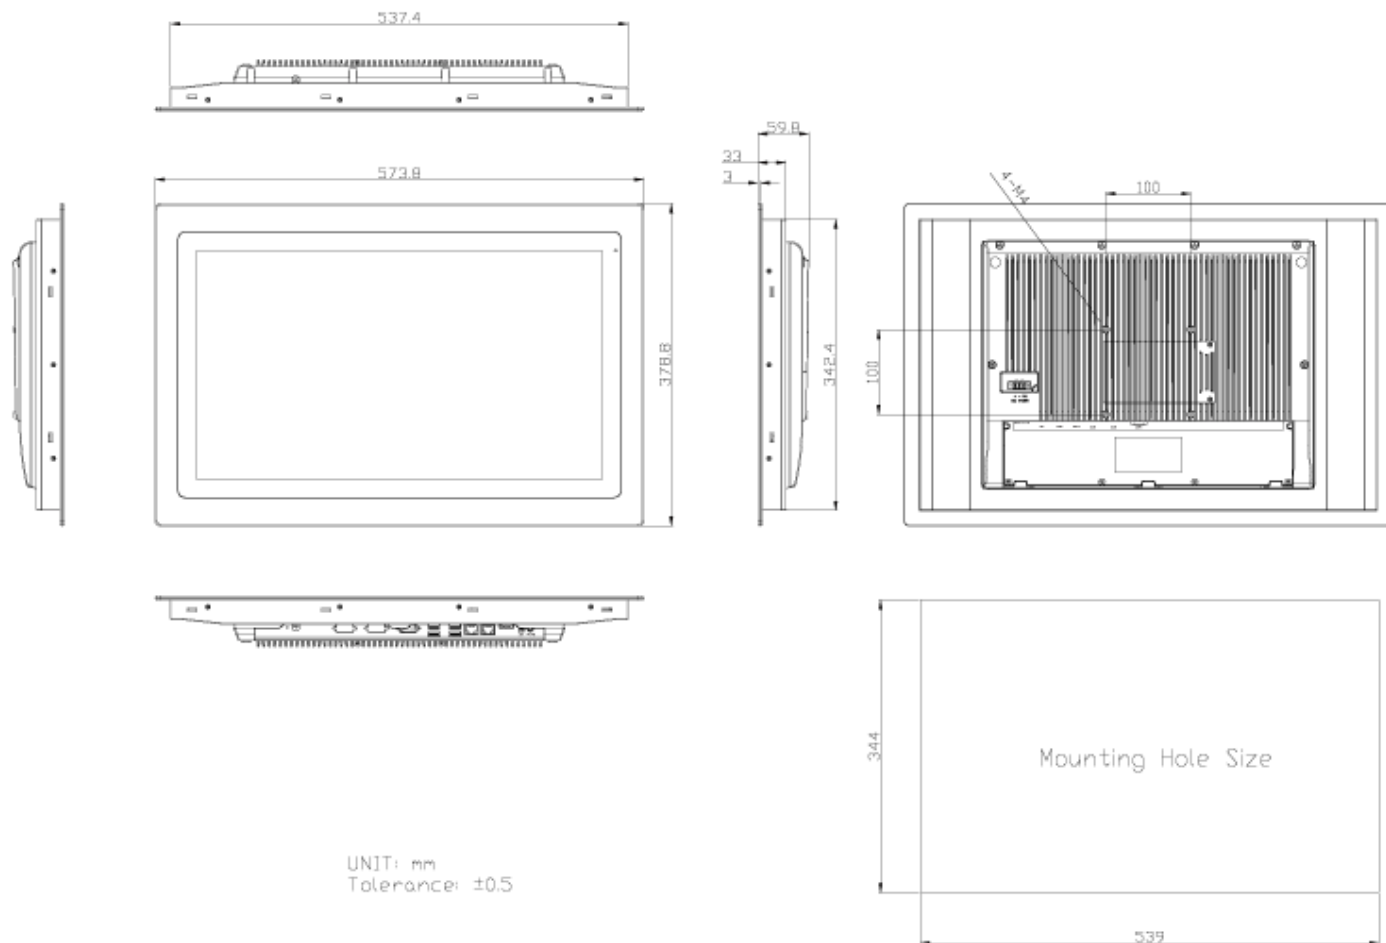

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw