

# TRT-3493-12

## 12" Ruggedized Tablet



### Key Highlights

- Intel Apollo Lake Quad-Core CPU
- NFC reader for RFID
- Weighs less than 2lbs (.9kg), the lightest rugged tablet in its class
- Gorilla Glass screen and rugged shock-absorbing frame
- Includes 1x Hot Swappable Battery

[VIEW ONLINE](#)

The Teguar TRT-3493-12 represents the ultimate in tablet versatility. Like all of Teguar's rugged tablets, the TRT-3493-12 has a Gorilla Glass screen and a drop rating of 4ft at any angle, making it suitable for even the most demanding applications. What sets the TRT-3493-12 apart is its modularity. Thanks to a variety of desktop and vehicle docking solutions offered, the TRT-3493-12 has the ability to be mounted or stored virtually anywhere. When it's time to take the TRT-3493-12 back into the field, users can utilize the back handstrap or a shoulder strap, both included with the tablet. Removable batteries with charging stations can also be provided to further increase operational time between charges. [> Read an independent review of this tablet on RuggedPCReview.com](#)

#### USA

Teguar  
2920 Whitehall Park Drive  
Charlotte, NC 28273  
+1 866-693-3105  
sales@teguar.com

#### EUROPE

Teguar Europe AG  
Churerstrasse 54, CH-8808  
Pfäffikon, Switzerland  
+41 41 561 53 11  
sales.EU@teguar.com

#### ASIA

Teguar Taiwan Ltd.  
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
+886 2 7751 5319  
sales@teguar.com.tw

# Technical Specifications

## Primary Components

Processor Family	Intel Pentium Apollo Lake
Processor Model	N4200E
Processor Speed	1.1 GHz
Memory Type	Onboard LPDDR4
Memory Support	8GB
Storage Type	M.2
Storage Support	M.2 128GB Standard, (Optional 256GB)

## External I/O Ports

USB	1x USB 3.0
Audio Ports	1x 3.5mm Audio Line-Out
Power Input Port	3.5mm DC-in Jack, Pogo Pin Connector

## Operating Systems

Windows	Windows 10 IoT
Linux	Linux CentOS 7, *Limited Configuration (Contact your sales rep for more information)

## Expansion Slots

Expansion Module support	Desktop Dock or Vehicle Dock with I/O Extension support
--------------------------	---

## Thermal & Environmental

Operating Temperature	-10°C - 50°C (14°F - 122°F)
Storage Temperature	-20°C - 60°C (-4°F - 140°F)
Humidity Range	10% - 90% Non-condensing
Storage Humidity	10% - 90% Non-condensing

## Peripherals & Wireless Connectivity

WiFi	WiFi 802.11 (a/b/g/n/ac)
Bluetooth	Bluetooth 4.2
Barcode Scanner	Optional 1D/2D Barcode Scanner, Swift Software Decoder
RFID	NFC
Sensors	Accelerometer, Gyroscope, Light Sensor

## Weight / Dimensions

Weight	0.895 kg (2.0 lbs)
Dimensions	307.9 x 207.9 x 29.3 mm (12.1 x 8.2 x 1.2 in)

## Warranty

Warranty	1 Year
----------	--------

Specifications subject to change.

## Display

Screen Size	11.6"
Screen Resolution	1920 x 1080 (Full HD)
Screen Ratio	16:9
Brightness	300 nits, Optional 500 nit

## Touch Screen

Touch Screen	Projected Capacitive (Multi-touch)
Glass Type	Gorilla Glass 3

## Power

Input Voltage Range	19V DC
Standard Power Adapter	AC to DC, DC 19V 65W Adaptor

## Battery

Battery Type	Hot Swappable 7.6V/2570mAh Battery
Battery Operating Time	4.2hrs

## Compatibility

Security Hardware	TPM 2.0
-------------------	---------

## Multimedia

Speakers	2x 0.8W Speakers
Camera	Front: 8MP Auto Focus w/flash, Rear: 8MP
Microphone	Built-in Microphone

## Enclosure

Material	Plastic
IP Rating	IP65
Color	Black
Led Indicator Light	Charging Indicator, Power
Control Buttons	Audio Down, Audio Up, Power Button
Programmable Function Buttons	3x Programmable Function Keys
Shock Rating	MIL-STD-810G Shock and Drop Resistant
Drop Rating	4ft Drop Protection

## Certification

Certifications	CE, FCC, VCCI
----------------	---------------

### USA

Teguar  
2920 Whitehall Park Drive  
Charlotte, NC 28273  
+1 866-693-3105  
sales@teguar.com


### EUROPE

Teguar Europe AG  
Churerstrasse 54, CH-8808  
Pfäffikon, Switzerland  
+41 41 561 53 11  
sales.EU@teguar.com

### ASIA

Teguar Taiwan Ltd.  
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
+886 2 7751 5319  
sales@teguar.com.tw

## I/O Diagram Images

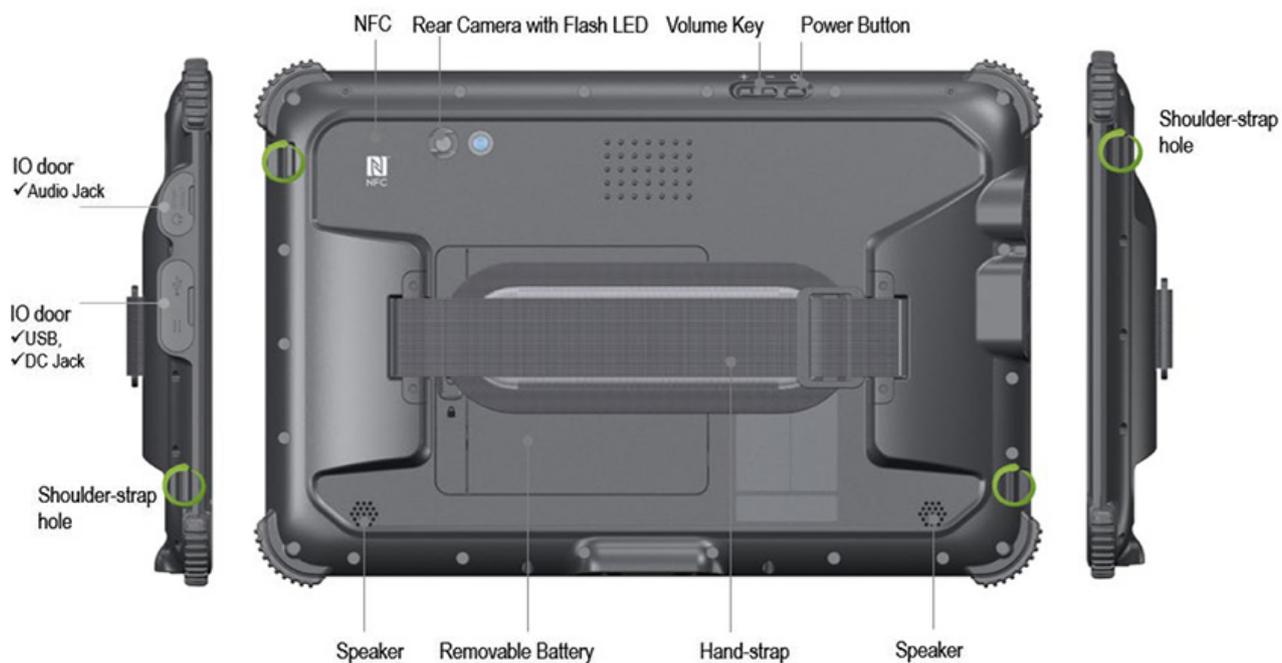

### USA

Teguar  
2920 Whitehall Park Drive  
Charlotte, NC 28273  
+1 866-693-3105  
sales@teguar.com

### EUROPE

Teguar Europe AG  
Churerstrasse 54, CH-8808  
Pfäffikon, Switzerland  
+41 41 561 53 11  
sales.EU@teguar.com

### ASIA

Teguar Taiwan Ltd.  
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
+886 2 7751 5319  
sales@teguar.com.tw

## Tech Diagram Images



### USA

Teguar  
2920 Whitehall Park Drive  
Charlotte, NC 28273  
+1 866-693-3105  
sales@teguar.com

### EUROPE

Teguar Europe AG  
Churerstrasse 54, CH-8808  
Pfäffikon, Switzerland  
+41 41 561 53 11  
sales.EU@teguar.com

### ASIA

Teguar Taiwan Ltd.  
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,  
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)  
+886 2 7751 5319  
sales@teguar.com.tw