

PINNACLE TP-7200-16

15.6" Core Ultra Panel PC



Key Highlights

- Latest Fanless Meteor Lake Processor
- 15.6" High Brightness Display with Direct Bonded Touch
- USB-C, Digital IO, HDMI Ports, Dual M.2 NVMe
- Stunning Sleek Form Factor
- Solid Cast-Aluminum Housing
- Windows 11 Pro and IOT

[VIEW ONLINE](#)

The 15.6" Panel PC from the TP-7200 Series is designed to be the pinnacle its kind, sure to exceed your expectations wherever it's needed. Its Core Ultra processor offers extremely high performance while maintaining the fanless passive cooling of the Pinnacle series. If you need a step further in the speed and efficiency department, add a boost in the form of a compatible Hailo card. Our [slimmest panel PC](#) yet requires up to 20% less installation space compared to traditional models, making it ideal for environments where every inch matters. The elegant construction maintains its durable quality with robust fanless cooling and an IP66 rated front bezel, built to withstand year after year of industrial demands. Finally, a direct bonded display provides a precisely responsive touch and great visual clarity, with either PCAP or resistive touch options. Teguar sets the bar high when it comes to screen visibility in the industrial setting. Your operators will notice the difference with this bright, high-resolution display, designed to deliver exceptional user experience even in challenging environments. For sheer power, durability, and space optimization, look no further than the TP-7200-16, designed from end to end to be the ultimate panel PC solution.

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Technical Specifications

Primary Components

Processor Family	Intel Core Ultra Series 14th Generation Meteor Lake
Processor Model	Core Ultra 5 - 125U
Processor Speed	2x Low-Power Efficient Cores up to 2.1GHz, 2x Performance Cores up to 4.3GHz, 8x Efficient Cores up to 3.6GHz
Memory Type	1x DDR5 SO-DIMM
Memory Support	32GB
Storage Type	1x M.2 M Key 2242 NVME SSD Slot, 1x M.2 M Key 2280 NVME SSD Slot
Storage Support	128GB-1TB

Power

Input Voltage Range	12-24V DC
Max Power Consumption	60W
Standard Power Adapter	Optional 100W USB-C PD PSU, Optional 90W 3-Pin Terminal Block PSU (19V/4.74A)

Operating Systems

Windows	Windows 10 IoT, Windows 11 IoT, Windows 11 Pro
Linux	Linux Ubuntu 24.04 or above (Contact your sales rep for more information)

Expansion Slots

Internal M.2	1x M.2 2230 Key E (for WiFi expansion option), 1x M.2 2242 M-Key slot for NVMe SSD or AI Accelerator, 1x M.2 2280 M-Key slot for NVMe SSD
Expansion Module support	I/O Expansion Area comes by default with 2x USB 2.0 Ports, Options for 2nd COM and 8-Pin GPIO/DIO are Available

Enclosure

Material	Aluminum
IP Rating	IP65 Front Bezel
Color	Black
Control Buttons	Power Button
Mounting Options	Panel Mount, VESA 100 Mount

Weight / Dimensions

Weight	3.1 kg (6.8 lbs)
Dimensions	379 x 231 x 48 mm (14.9 x 9.1 x 1.9 in)

Warranty

Warranty	Up to 5 Years
-----------------	---------------

Specifications subject to change.

Display

Screen Size	15.6"
Screen Ratio	16:9
Brightness	800 nits

Touch Screen

Touch Screen	Projected Capacitive (Multi-touch), Resistive
---------------------	---

External I/O Ports

USB	1x USB 3.2 Type C (PD Input/DP Alt Mode), 2x USB 3.2
Serial / Com	1x COM
Serial Protocol Detail	COM1 and COM2 both support RS232/422/485 (COM 2 is an Optional Expansion)
Ethernet / LAN	1x RJ45 2.5 GbE LAN, 1x RJ45 GbE LAN
Video Outputs	1x DisplayPort via USB-C Alt Mode, 1x HDMI
Audio Ports	1x 3.5mm Audio Line-Out/Mic-In
Power Input Port	3-Pin DC-In (Phoenix Type), Optional POE, USB Type-C PD Input

Compatibility

Security Hardware	fTPM 2.0
--------------------------	----------

Thermal & Environmental

Operating Temperature	0°C - 50°C (32°F - 122°F)
Storage Temperature	-20°C - 60°C (-4°F - 140°F)
Cooling Solution	Passive - Fanless with Heatsink
Humidity Range	10% - 90% Non-condensing
Storage Humidity	10% - 93% Non-condensing

Peripherals & Wireless Connectivity

WiFi	Optional WiFi 6E
Bluetooth	Optional Bluetooth 5.2

Certification

Certifications	CE, FCC
-----------------------	---------

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com


EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com


ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Inputs / Outputs

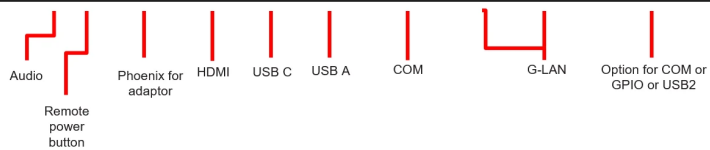

Technical Drawings

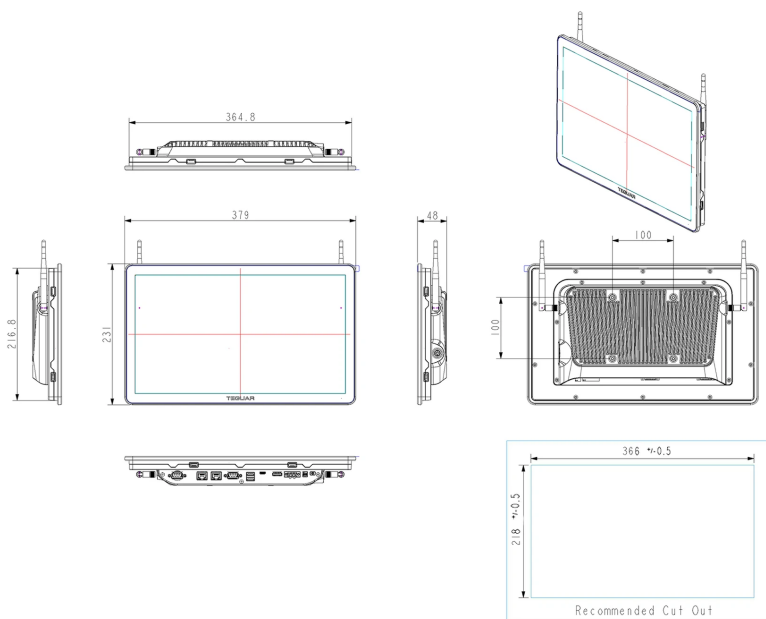

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw