

TSI-5945-22

22" Operator Interface Terminal



Key Highlights

- 22" Full HD Touch Screen
- 11th Generation Core i3/i5 Processor
- 5x Buttons by Default, 3x More Optional
- 2.5 GbE LAN
- Able to Swing Arm or Pole Mount
- [Need customization? Click here for OEM services.](#)

[VIEW ONLINE](#)

The 22" Operator Interface Terminal is a robust solution for general manufacturing, featuring IP65 waterproofing and five front buttons for intuitive control in demanding environments. Designed for swing arm or pole mounting and compatible with Rittal mounts, it offers versatile installation options. The 11th Generation CPU ensures high-performance computing to manage quick stop equipment effectively. Ideal for factories requiring reliable operation and durability, this terminal enhances productivity and safety with its rugged design and seamless integration capabilities.

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Technical Specifications

Primary Components	
Processor Family	Intel Core I series 11th Generation Tiger Lake
Processor Model	Core i3-1115G4E
Processor Speed	2.2 GHz, Up to 3.9 GHz
Memory Type	2x DDR4 SO-DIMM
Memory Support	4GB, 8GB, 16GB, 32GB, 64GB
Storage Type	1x M.2 2280 NVME SSD slot
Storage Support	M.2: 128GB-1TB

Power	
Input Voltage Range	9-36V DC

Operating Systems	
Windows	Windows 10 IoT, Windows 10 Pro, Windows 11 Pro

Compatibility	
Security Hardware	TPM 2.0

Expansion Slots	
Other	Default 5x Buttons- 1x Emergency-Stop, 1x Blue Button, 1x Red Button, 1x Green Button, and 1x USB 2.0, Optional 1x Key Switch, Optional 3x Black Push Buttons

Enclosure	
Material	Aluminum front bezel and Stainless Steel Swing Arm
IP Rating	IP65
Color	Silver
Mounting Options	Swing Arm, Rittal CP-40

Warranty	
Warranty	Up to 5 Years

Specifications subject to change.

Display	
Screen Size	21.5"
Resolution	1920 x 1080 (Full HD)
Screen Ratio	16:9
Brightness	250 nits

Touch Screen	
Touch Screen	Projected Capacitive (Multi-touch)

External I/O Ports	
USB	1x USB 3.2 Type-C, 4x USB 3.2
Serial / Com	1x COM
Serial Protocol Detail	RS-232(Default)/RS-422/RS-485
Ethernet / LAN	1x RJ45 2.5 GbE LAN, 1x RJ45 GbE LAN
Video Outputs	1x DisplayPort, 1x HDMI
Other Ports	2x Button PINs, 40x PINs to Operator Buttons
Power Input Port	3-Pin DC-In (Phoenix Type)

Thermal & Environmental	
Operating Temperature	0°C - 55°C (32°F - 131°F)
Cooling Solution	Passive - Fanless
Humidity Range	0% - 90% Non-condensing



Certification	
Certifications	CE, FCC

USA
Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE
Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA
Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

I/O Diagram Images

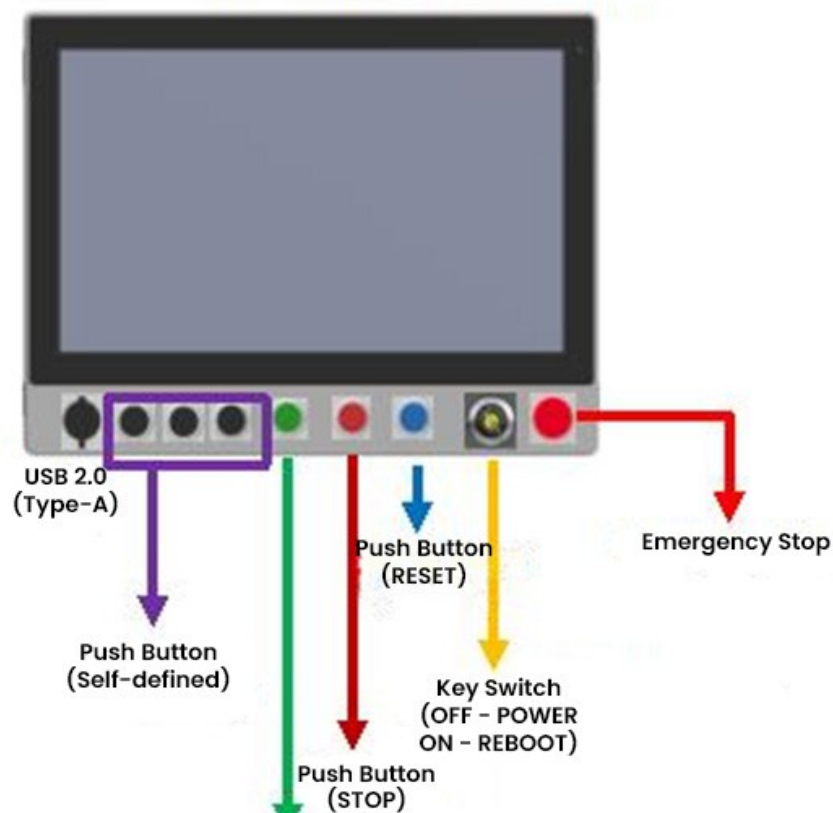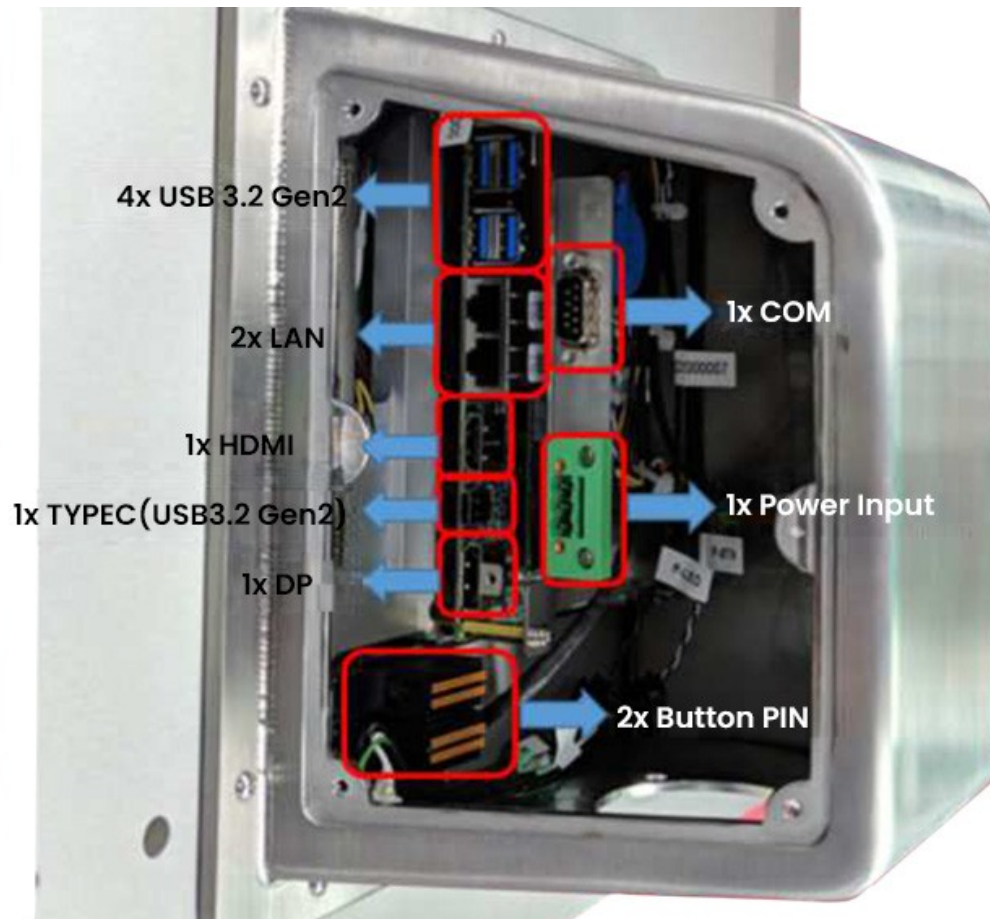

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com


EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Tech Diagram Images

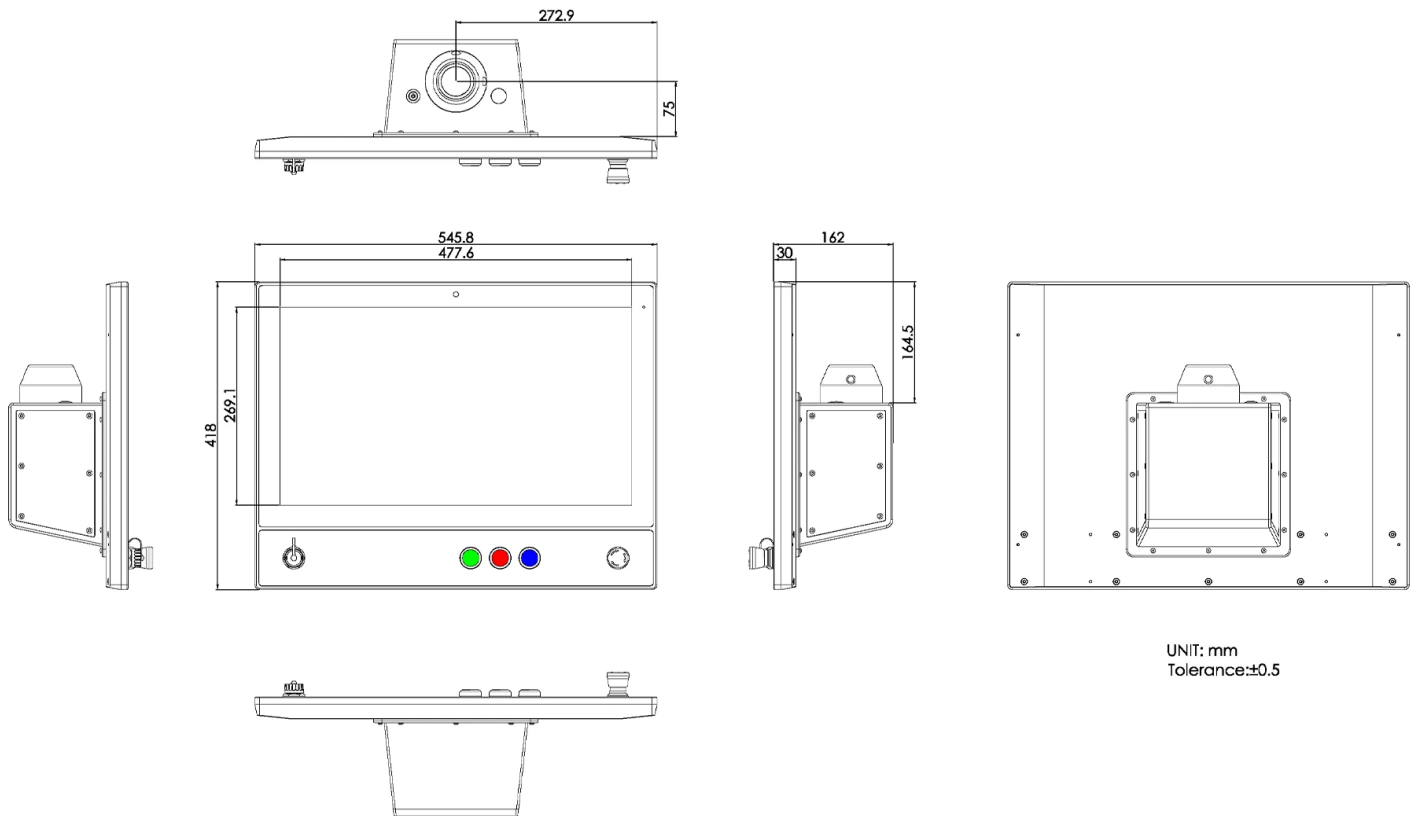

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw