

TP-4845-15

15" Panel PC



Key Highlights

- 15" Resistive or PCAP Touchscreen
- Intel Celeron J6412 Quad Core Processor
- Designed for flexible IO expansion
- Windows 11 Capabilities
- Die Cast Aluminum Housing and IP66 Rated Front Bezel

[VIEW ONLINE](#)

The 15" [Panel PC](#) redefines rugged efficiency. Driven by the Intel J6412 Quad Core processor, it runs Windows 11 seamlessly. With integrated WiFi 6 support, it adapts to demanding industrial environments. Its die-cast aluminum housing and IP66 rated front bezel ensure robustness amid challenges. The TP-4845-15 variant offers expandable I/O options, creating a tailor-made solution for specific project needs.

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

Technical Specifications

Primary Components	
Processor Family	Intel Celeron Elkhart Lake
Processor Model	Celeron J6412
Processor Speed	2.0 GHz, Up to 2.6 GHz
Memory Type	1x DDR4 SO-DIMM
Memory Support	4GB, 8GB, 16GB, 32GB
Storage Type	1x M.2 SATA3 2242 Slot
Storage Support	M.2: 256GB-1TB
Power	
Input Voltage Range	9-36V DC
Standard Power Adapter	Optional 12V AC/DC Adapter, 5A, 60W
Battery	
Battery Type	Optional Internal Battery
Operating Systems	
Windows	Windows 10 IoT, Windows 10 Pro, Windows 11 Pro
Multimedia	
Speakers	Optional Speaker
Enclosure	
Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Gray
Mounting Options	Panel Mount, VESA 100 Mount
Weight / Dimensions	
Weight	4.5 kg (9.9 lbs)
Dimensions	410 x 310 x 54.7 mm (16.1 x 12.2 x 2.2 in)
Warranty	
Warranty	Up to 5 Years

Specifications subject to change.

Display	
Screen Size	15"
Screen Ratio	4:3
Brightness	300 nits, Optional 1000 nit High Brightness
Touch Screen	
Touch Screen	Projected Capacitive, Resistive
External I/O Ports	
USB	2x USB 2.0, 2x USB 3.2
Serial / Com	1x COM
Serial Protocol Detail	RS-232/422/485 (Default RS-232; select via BIOS)
Ethernet / LAN	2x RJ45 2.5 GbE LAN
Video Outputs	1x DisplayPort, supports DP++
Audio Ports	1x Audio Line-Out
Power Input Port	2-Pin Power Switch, 3-Pin DC-In (Phoenix Type), Optional POE++, 45W with 2x USB 2.0
Expansion Slots	
Internal M.2	1x M.2 2230 Key E (for WiFi expansion option)
Thermal & Environmental	
Operating Temperature	0°C - 50°C (32°F - 122°F), -20°C - 60°C (Optional -4°F - 140°F)
Storage Temperature	-30°C - 70°C (-22°F - 158°F)
Cooling Solution	Passive - Fanless with Heatsink
Humidity Range	10% - 95% Non-condensing
Peripherals & Wireless Connectivity	
WiFi	Optional WiFi
Bluetooth	Optional Bluetooth 4.0
Certification	
Certifications	CE, FCC, UL 62368

USA
Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE
Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA
Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw



- A** DC In
- B** Audio Line Out
- C** Remote Power Switch
- D** Display Port

- E** LAN (x2)
- F** USB 3.2 (x2)
- G** COM
- H** USB 2.0 (x2)

USA


Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw

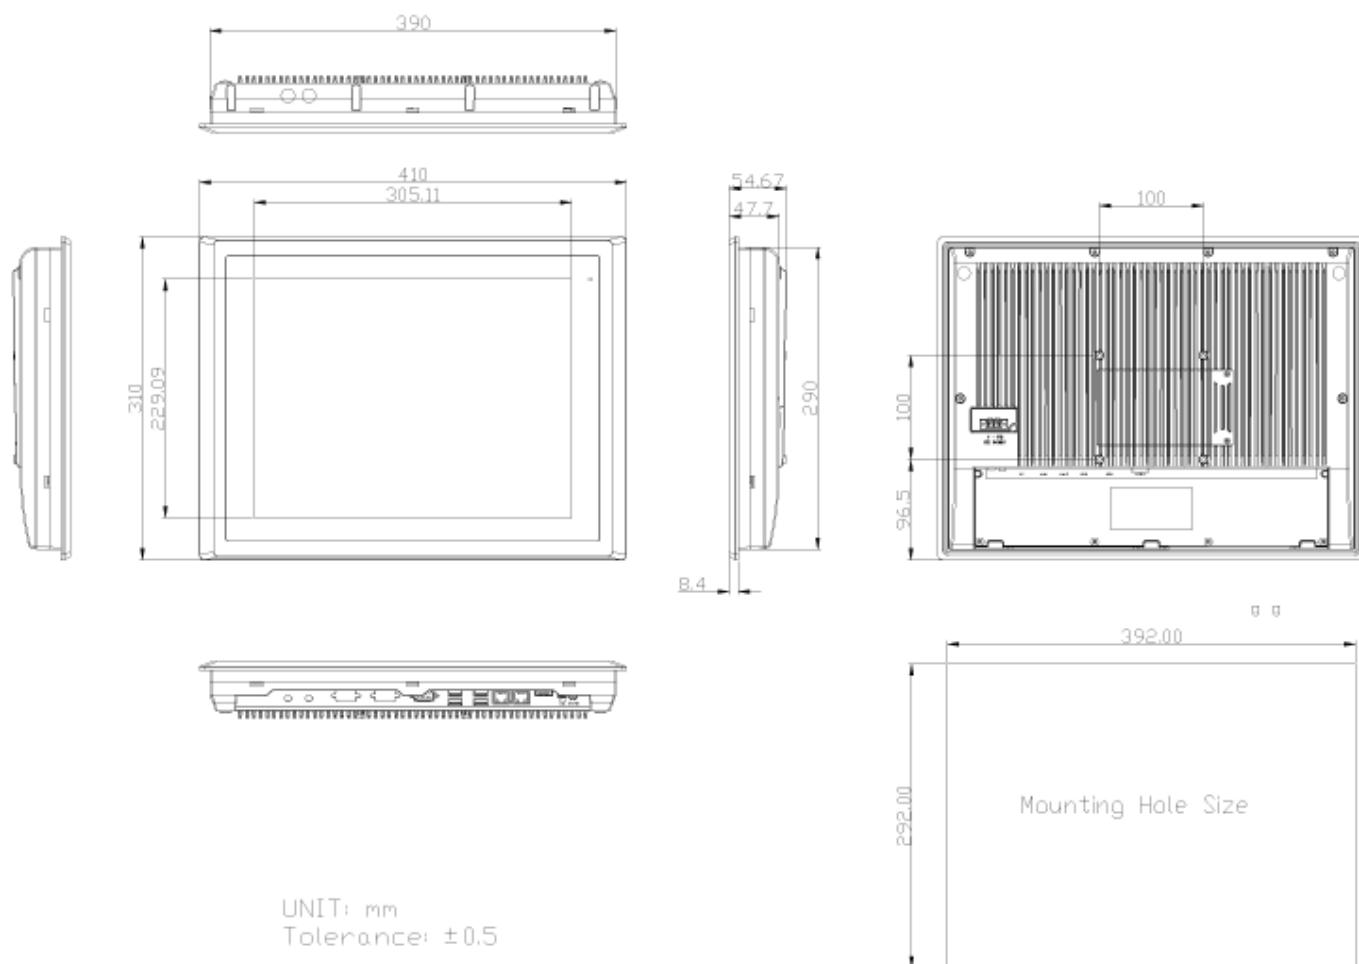

USA

Teguar
2920 Whitehall Park Drive
Charlotte, NC 28273
+1 866-693-3105
sales@teguar.com

EUROPE

Teguar Europe AG
Churerstrasse 54, CH-8808
Pfäffikon, Switzerland
+41 41 561 53 11
sales.EU@teguar.com

ASIA

Teguar Taiwan Ltd.
Rm. A, 28F-12., No.99, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
+886 2 7751 5319
sales@teguar.com.tw