



## Features

- 11.6" LED with PCAP Touchscreen
- Intel Celeron J6412 Quad-Core CPU
- Slim, Durable Housing with Small Form Factor
- USB Type C
- Customizable and Modular

## Technical Specifications

### Primäre Komponenten

|                  |                            |
|------------------|----------------------------|
| Processor Family | Intel Celeron Elkhart Lake |
| Processor Model  | Celeron J6412              |
| Memory Type      | 1x DDR4 SO-DIMM            |
| Memory Support   | 4GB, 8GB, 16GB             |
| Storage Type     | 1x M.2 slot for SSD        |
| Storage Support  | M.2: 128GB-1TB             |

### Display

|              |          |
|--------------|----------|
| Screen Size  | 11.6"    |
| Screen Ratio | 16:9     |
| Brightness   | 300 nits |

### Touchscreen

|              |                                    |
|--------------|------------------------------------|
| Touch Screen | Projected Capacitive (Multi-touch) |
|--------------|------------------------------------|

### Externe E/A-Ports

|                        |  |
|------------------------|--|
| USB                    | 2x USB 2.0, 2x USB 3.0, 2x USB 3.0 type C, 2x USB Type C (Data only) |
| Serial / Com           | 2x COM   |
| Serial Protocol Detail | x2 RS-232 DB-9   |
| Ethernet / LAN         | 1x RJ45 GbE LAN  |
| Power Input Port       | 4-Pole DIN (latching)  |

### Leistung

|                        |                   |
|------------------------|-------------------|
| Input Voltage Range    | 19V DC            |
| Standard Power Adapter | 65W AC/DC Adapter |

## Betriebssysteme

|         |  |
|---------|--|
| Windows | Windows 10 IoT, Windows 10 Pro, Windows 11 IoT, Windows 11 Pro |
| Linux   | Linux (Contact your sales rep for more information)            |

## Kompatibilität

|                   |          |
|-------------------|----------|
| Security Hardware | fTPM 2.0 |
|-------------------|----------|

## Erweiterungssteckplätze

|                          |   |
|--------------------------|---|
| Internal M.2             | 1x M.2 2230 Key E (for WiFi expansion option) |
| Expansion Module support | 2 USB based expansion areas on Bezel          |

## Multimedia

|          |                 |
|----------|-----------------|
| Speakers | 1x 3W Speaker   |
| Camera   | Optional Webcam |

## Thermisch & Umwelt

|                       |                             |
|-----------------------|-----------------------------|
| Operating Temperature | 0°C - 35°C (32°F – 95°F)    |
| Storage Temperature   | -20°C - 60°C (-4°F – 140°F) |
| Cooling Solution      | Passive – Fanless           |
| Humidity Range        | 20% – 85% Non-condensing    |

## Gehäuse

|                  |                  |
|------------------|------------------|
| Material         | Plastic          |
| IP Rating        | IP54 Front Bezel |
| Color            | Black            |
| Mounting Options | VESA 75 Mount    |

## Peripheriegeräte und drahtlose Konnektivität

|                  |   |
|------------------|---|
| WiFi             | Optional through M.2 interface                                  |
| Bluetooth        | Optional Bluetooth 5.1  |
| Barcode Scanner  | Optional 1D/2D Barcode Scanner                                  |
| RFID             | Optional 13.56 NFC External Module                              |
| Peripheral Other | Contact Teguar is you have a customized external Module request |

## Gewicht / Abmessungen

|            |   |
|------------|---|
| Weight     | 1.4 kg (3.1 lbs)                        |
| Dimensions | 277 x 181 x 41 mm (10.9 x 7.1 x 1.6 in) |


## Zertifizierung

|                |         |
|----------------|---------|
| Certifications | CE, FCC |
|----------------|---------|


## Garantie

|          |               |
|----------|---------------|
| Warranty | Up to 5 Years |
|----------|---------------|

### I/O Diagram Images

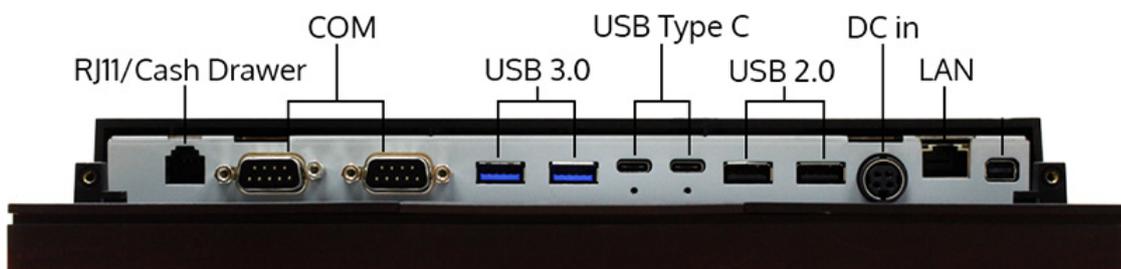

### Tech Diagram Images

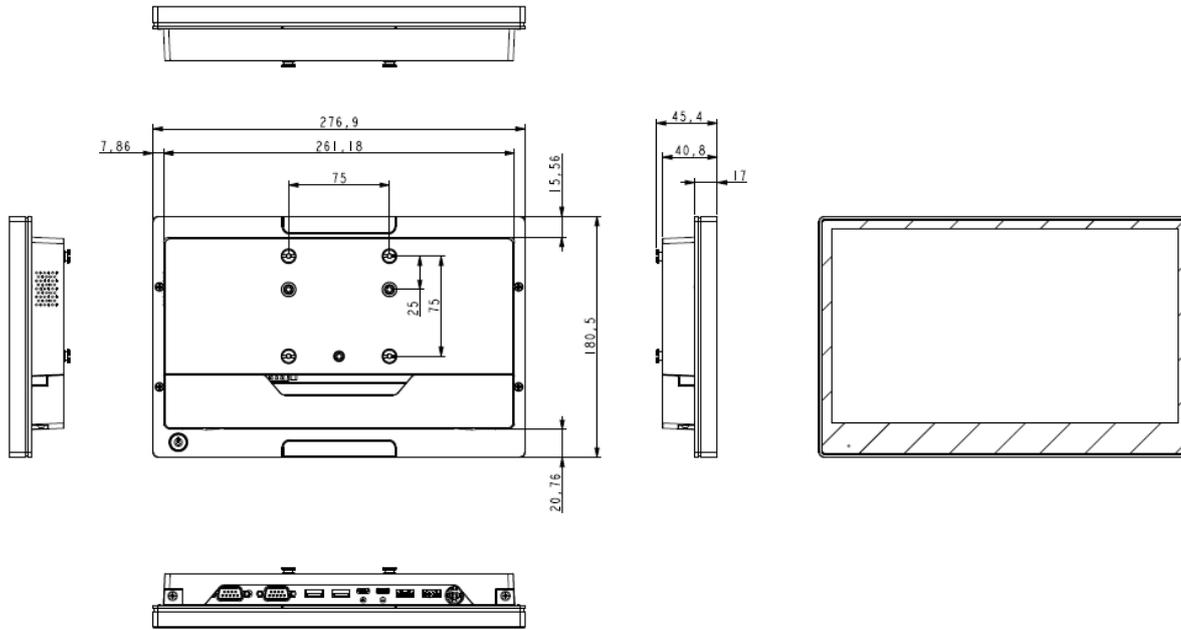

*All specifications are subject to change without notice.*