

## Features



- Intel Celeron J6412 Processor Passmark Rating 3846
- Supports Chrome, Windows 10, and Windows 11
- Fanless Cooling System
- Empowered by Hailo-8 M.2 AI module up to 26 TOPS (available upon request)
- Supports Dual Display

## Technical Specifications

### Primäre Komponenten

|                  |   |
|------------------|---|
| Processor Family | Intel Celeron Elkhart Lake                          |
| Processor Model  | Celeron J6412                                       |
| Processor Speed  | Up to 2.6 GHz                                       |
| Memory Type      | Onboard DDR4  |
| Memory Support   | 4GB   |
| Storage Type     | 1x M.2 2242 Slot, SATA3 or NVMe, Onboard eMMC Flash |
| Storage Support  | 128GB (On board), M.2: 128GB-1TB                    |

### Externe E/A-Ports

|                        |  |
|------------------------|--|
| USB                    | 1x USB 2.0, 3x USB 3.0                                     |
| Serial / Com           | 1x COM   |
| Serial Protocol Detail | DB9  |
| Ethernet / LAN         | 1x RJ45 GbE LAN  |
| Video Outputs          | 1x DisplayPort, 1x DisplayPort via USB-C Alt Mode, 1x HDMI |
| Audio Ports            | 1x 3.5mm Audio Line-Out/Mic-In                             |

### Leistung

|                        |                                 |
|------------------------|---------------------------------|
| Input Voltage Range    | 12V DC                          |
| Standard Power Adapter | 12V/3.0A US AC Power Supply 36W |

### Betriebssysteme

|         |  |
|---------|--|
| Windows | Windows 10 IoT, Windows 10 Pro, Windows 11 Pro |
| Android | Android 13                                     |
| Linux   | Linux  |

### Kompatibilität

|                   |          |
|-------------------|----------|
| Security Hardware | fTPM 2.0 |
|-------------------|----------|

## Erweiterungssteckplätze

|              |  |
|--------------|--|
| Internal M.2 | 1x M.2 2230 Key E (for WiFi expansion option), 1x M.2 for NVME SSD Support |
| SD card      | 1x Micro SD Slot   |

## Thermisch & Umwelt

|                       |                             |
|-----------------------|-----------------------------|
| Operating Temperature | 0°C - 35°C (32°F – 95°F)    |
| Storage Temperature   | -20°C - 60°C (-4°F – 140°F) |
| Cooling Solution      | Passive                     |
| Humidity Range        | 20% – 85% Non-condensing    |

## Gehäuse

|                     |                               |
|---------------------|-------------------------------|
| Material            | Aluminum, Plastic             |
| Color               | Black                         |
| Led Indicator Light | Power                         |
| Control Buttons     | Power Button                  |
| Mounting Options    | VESA 100 Mount, VESA 75 Mount |

## Peripheriegeräte und drahtlose Konnektivität

|           |                        |
|-----------|------------------------|
| WiFi      | WiFi 6 (optional)      |
| Bluetooth | Optional Bluetooth 5.2 |

## Gewicht / Abmessungen

|            |  |
|------------|--|
| Weight     | 0.36 kg (0.8 lbs)                      |
| Dimensions | 120 x 120 x 23 mm (4.7 x 4.7 x 0.9 in) |


## Zertifizierung

|                |                             |
|----------------|-----------------------------|
| Certifications | CE, FCC, FCC ID, RoHS, UKCA |
|----------------|-----------------------------|


## Garantie

|          |               |
|----------|---------------|
| Warranty | Up to 5 Years |
|----------|---------------|

## I/O Diagram Images

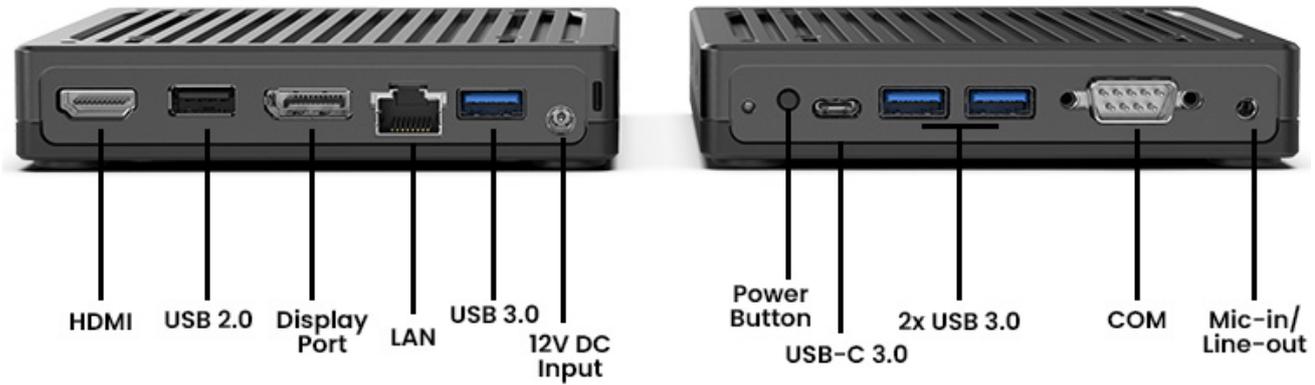

Tech Diagram Images

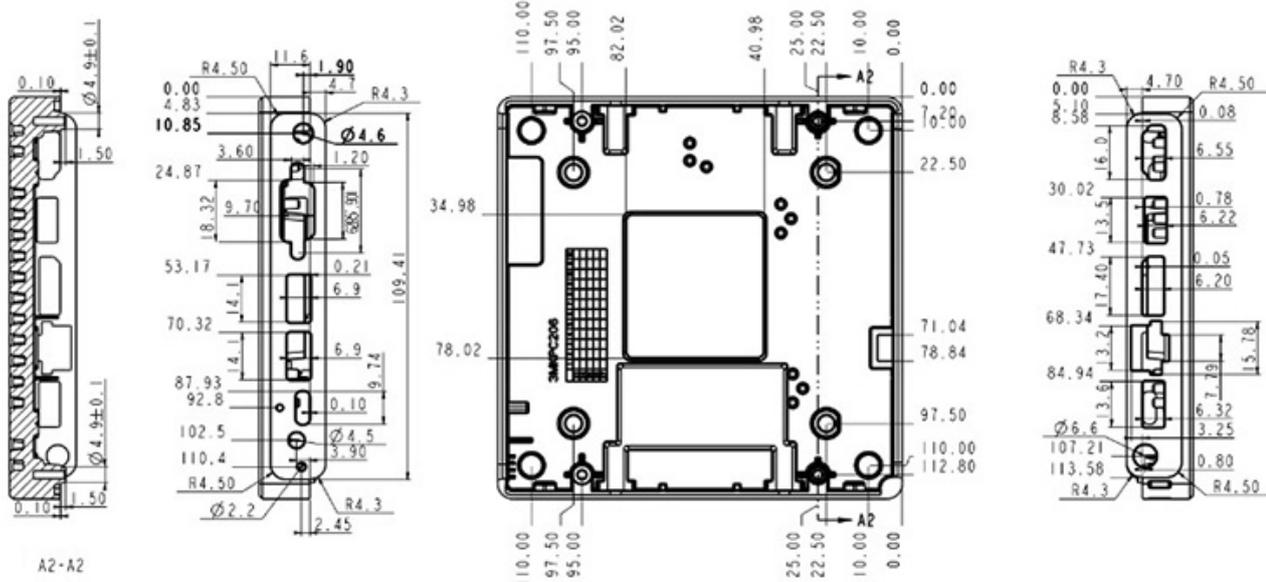

All specifications are subject to change without notice.