



## Features

- 12.1" LCD with 800x600 or 1024x768 Resolution
- Rugged Die Cast Aluminum Enclosure
- Full Flat Front Panel
- Resistive or Projected Capacitive Touchscreen
- Wide Range DC 9~36V Power Input
- IP66 Compliant Front Panel

## Technical Specifications

### Display

Screen Size	12.1"
Screen Ratio	4:03
Brightness	450 nits, Optional 1000 nit High Brightness

### Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

### Externe E/A-Ports

Audio Ports	1x Optional Line in by RCA Jack
Power Input Port	3-Pin DC-In (Phoenix Type)

### Leistung

Input Voltage Range	9-32V DC
Max Power Consumption	7.9W (Resistive), 14.8W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

### Multimedia

Speakers	Optional Speaker
----------	------------------

### Thermisch & Umwelt

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

## Gehäuse

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA 100 Mount

## Gewicht / Abmessungen

Weight	2.7 kg (6.0 lbs)
Dimensions	319 x 245 x 51.6 mm (12.6 x 9.6 x 2.0 in)


## Zertifizierung

Certifications	CE, FCC Class A
----------------	-----------------


## Garantie

Warranty	Up to 5 Years
----------	---------------

### I/O Diagram Images

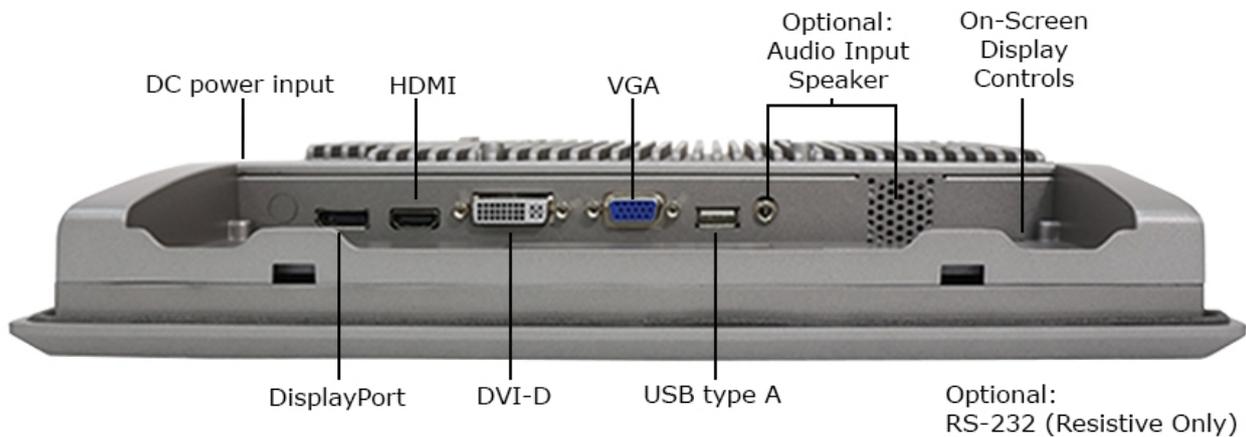

### Tech Diagram Images

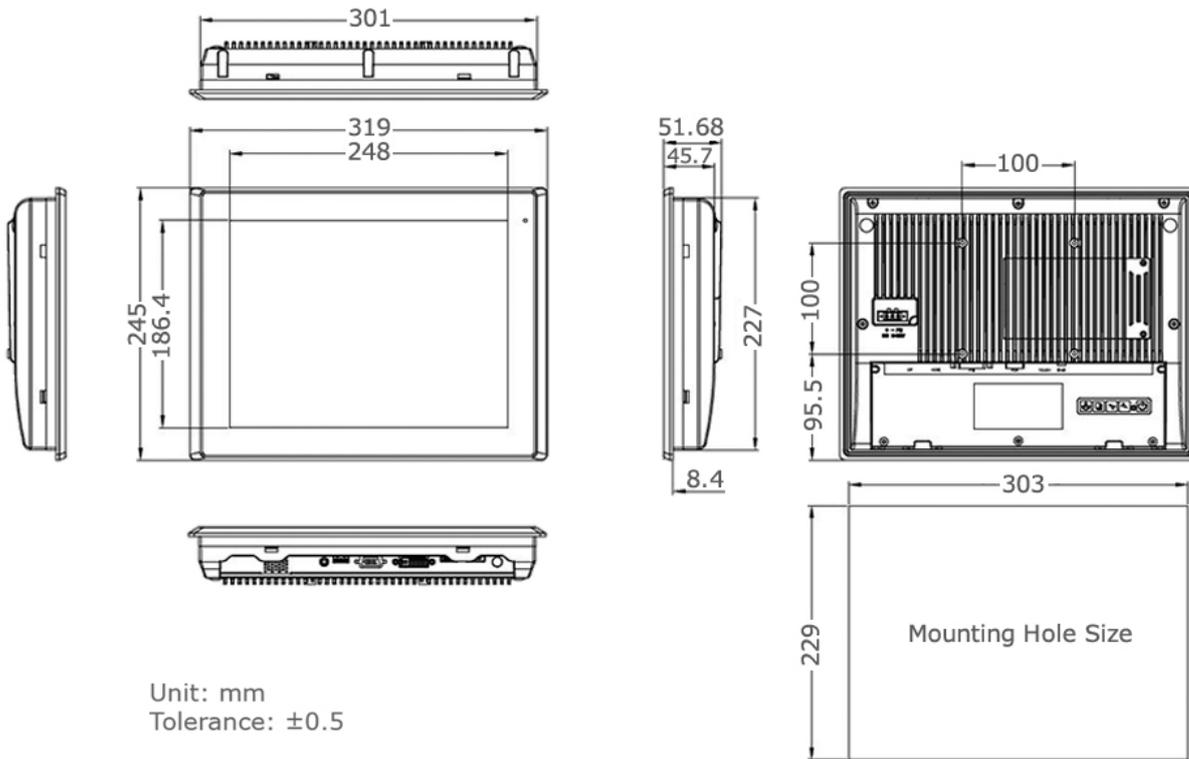

Unit: mm  
Tolerance: ±0.5

*All specifications are subject to change without notice.*