



Features

- 15.6" High Resolution LCD Touchscreen
- Rugged Die Cast Aluminum Enclosure
- Optional Sunlight Readable 1000 Nit LCD
- IP66 Compliant Front Panel
- Resistive or Projected Capacitive Touchscreen
- Wide Range DC 9~36V Power Input

Technical Specifications

Display

Screen Size	15.6"
Screen Ratio	16:09
Brightness	300 nits, Optional 1000 nit High Brightness

Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

Externe E/A-Ports

Audio Ports	1x Optional Speaker with 1x Audio Input
Power Input Port	3-Pin DC-In (Phoenix Type)

Leistung

Input Voltage Range	9-32V DC
Max Power Consumption	12.2W (Resistive), 12.3W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermisch & Umwelt

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Gehäuse

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA 100 Mount
Approved Cleaning Solutions	Alcohol, Chlorine and Compounds, Glutaraldehyde, Hydrogen Peroxide, Ortho-phthalaldehyde (OPA), Quaternary Ammonium Compounds

Gewicht / Abmessungen

Weight	4.4 kg (9.7 lbs)
Dimensions	412 x 277.5 x 58.9 mm (16.2 x 10.9 x 2.3 in)


Zertifizierung

Certifications	CE, FCC Class A
----------------	-----------------


Garantie

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images

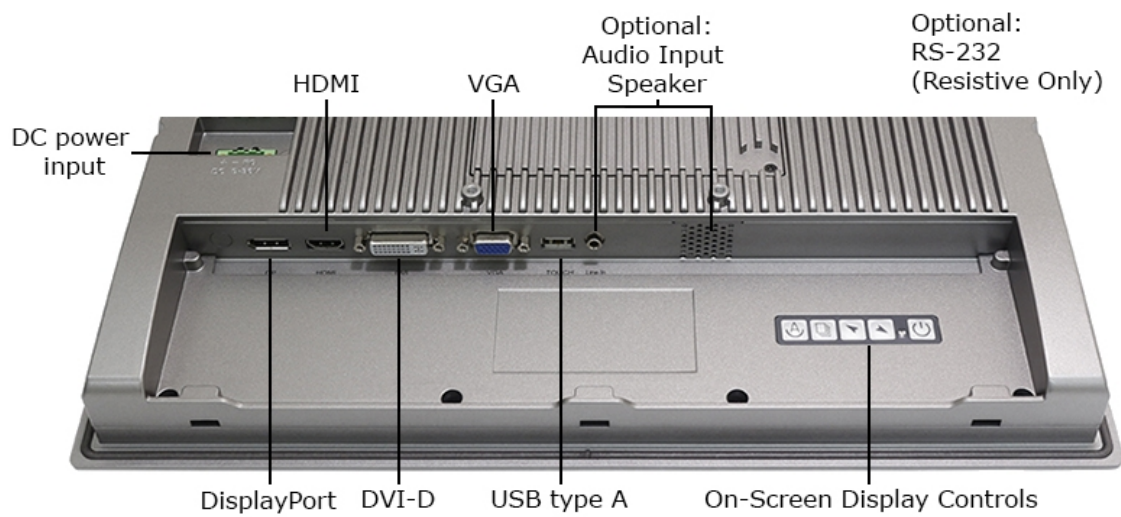

Tech Diagram Images

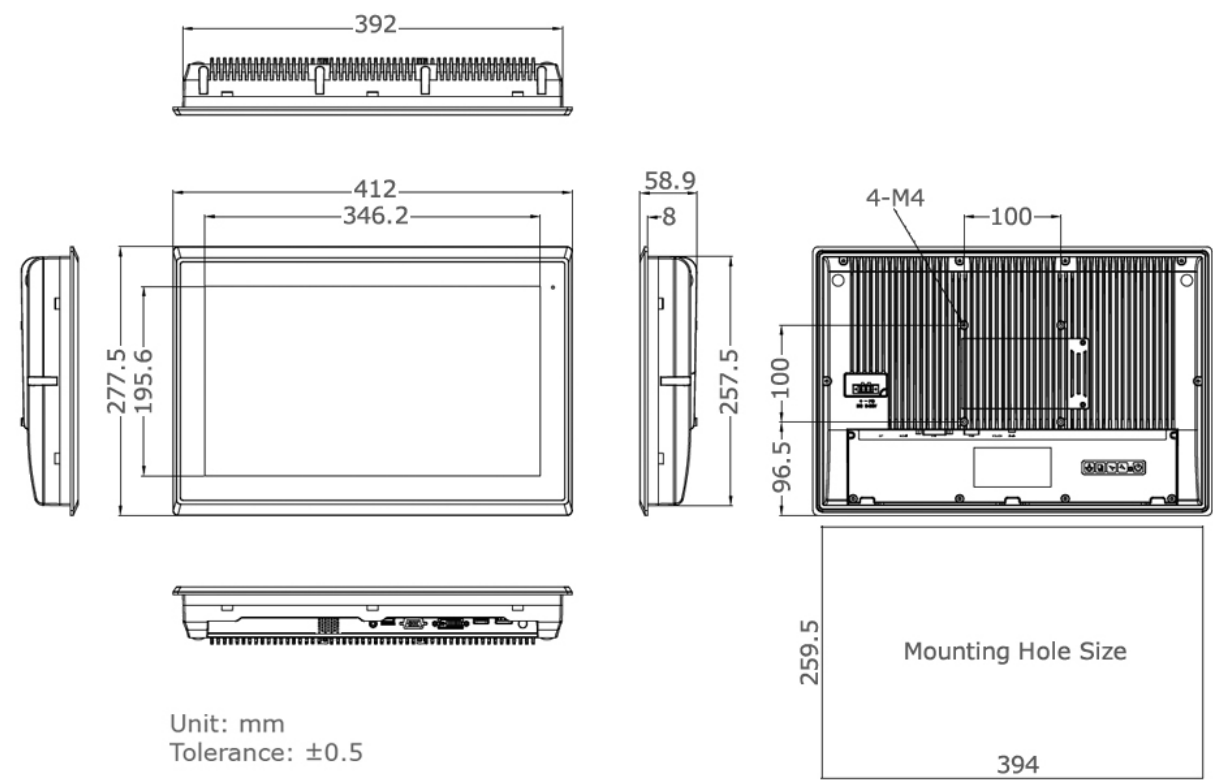

All specifications are subject to change without notice.