



Features

- 18.5" LCD with 1366 x 768 Resolution
- Optional Sunlight Readable 1000 Nit LCD
- Rugged Die Cast Aluminum Enclosure
- Full Flat Front Panel and Fanless Design
- Resistive or Projected Capacitive Touchscreen
- Wide Range DC 9~36V Power Input

Technical Specifications

Display

Screen Size	18.5"
Screen Ratio	16:09
Brightness	300 nits, Optional 1000 nit High Brightness

Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

Externe E/A-Ports

Audio Ports	1x Optional Speaker with 1x Audio Input
Power Input Port	3-Pin DC-In (Phoenix Type)

Leistung

Input Voltage Range	9-32V DC
Max Power Consumption	19.7W (Resistive), 30.2W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermisch & Umwelt

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Gehäuse

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA 100 Mount
Approved Cleaning Solutions	Acetone, Alcohol, Club Soda, Hydrochloric Acid, Methyl Alcohol, Mineral Spirits, Nitric Acid, Sulfuric Acid (low concentration), Vinegar, Warm Water

Gewicht / Abmessungen

Weight	6.4 kg (14.1 lbs)
Dimensions	499.6 x 314.6 x 59.9 mm (19.7 x 12.4 x 2.4 in)


Zertifizierung

Certifications	CE, FCC Class A
----------------	-----------------


Garantie

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images

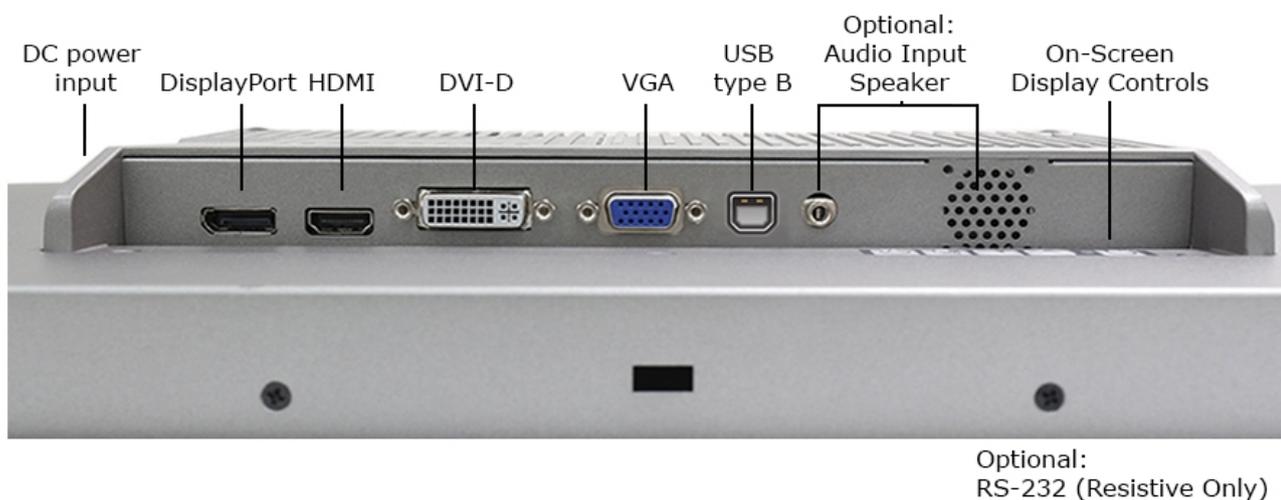

Tech Diagram Images

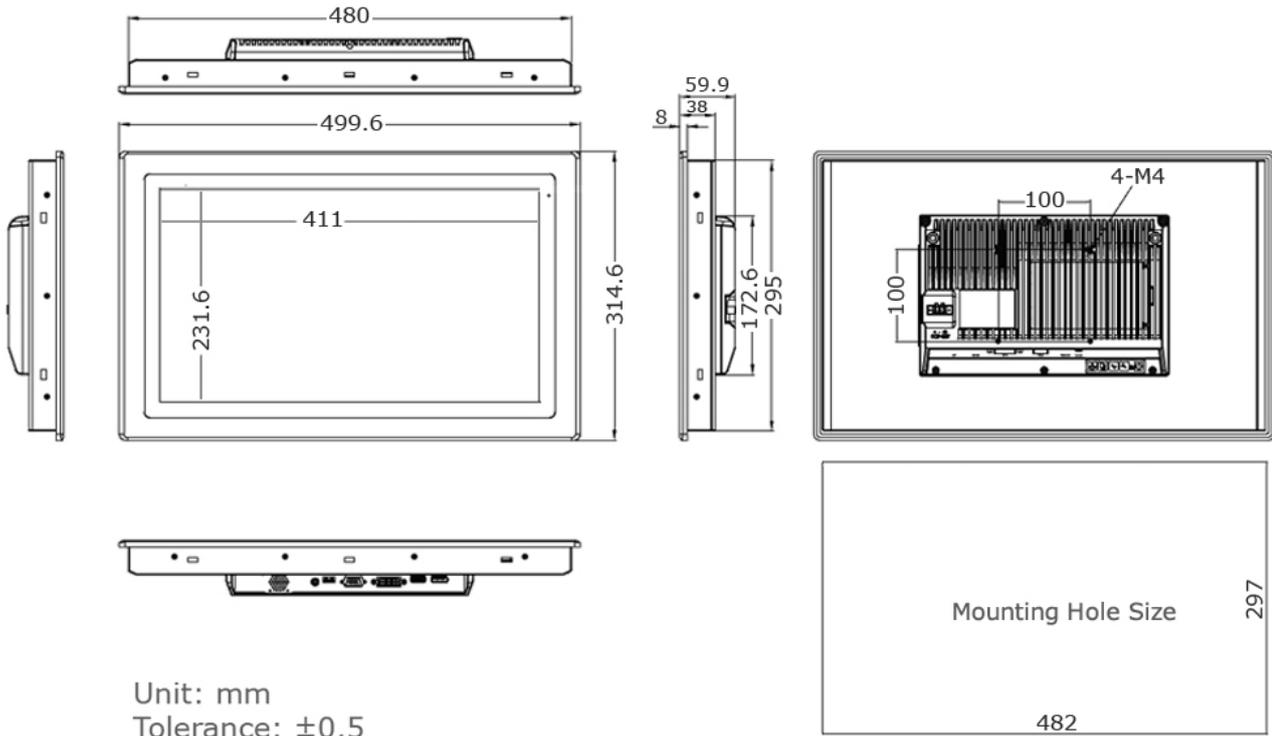

All specifications are subject to change without notice.