



Features

- 15" Resistive or PCAP Touchscreen
- Intel Celeron J6412 Quad Core Processor
- Designed for flexible IO expansion
- Windows 11 Capabilities
- Die Cast Aluminum Housing and IP66 Rated Front

Technical Specifications

Primäre Komponenten

Processor Family	Intel Celeron Elkhart Lake
Processor Model	Celeron J6412
Processor Speed	2.0 GHz, Up to 2.6 GHz
Memory Type	1x DDR4 SO-DIMM
Memory Support	4GB, 8GB, 16GB, 32GB
Storage Type	1x M.2 SATA3 2242 Slot
Storage Support	M.2: 256GB-1TB

Display

Screen Size	15"
Screen Ratio	4:3
Brightness	300 nits, Optional 1000 nit High Brightness

Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

Externe E/A-Ports

USB	2x USB 2.0, 2x USB 3.2
Serial / Com	1x COM
Serial Protocol Detail	RS-232/422/485 (Default RS-232; select via BIOS)
Ethernet / LAN	2x RJ45 2.5 GbE LAN
Video Outputs	1x DisplayPort, supports DP++
Audio Ports	1x Audio Line-Out
Power Input Port	2-Pin Power Switch, 3-Pin DC-In (Phoenix Type), Optional POE++, 45W with 2x USB 2.0

Leistung

Input Voltage Range	9-36V DC
Standard Power Adapter	Optional 12V AC/DC Adapter, 5A, 60W

Batterie

Battery Type Optional Internal Battery

Betriebssysteme

Windows Windows 10 IoT, Windows 10 Pro, Windows 11 Pro

Erweiterungssteckplätze

Internal M.2 1x M.2 2230 Key E (for WiFi expansion option)

Multimedia

Speakers Optional Speaker

Thermisch & Umwelt

Operating Temperature 0°C - 50°C (32°F – 122°F), -20°C - 60°C (Optional -4°F – 140°F)

Storage Temperature -30°C - 70°C (-22°F – 158°F)

Cooling Solution Passive – Fanless with Heatsink

Humidity Range 10% – 95% Non-condensing

Gehäuse

Material Aluminum

IP Rating IP66 Front Bezel

Color Gray

Mounting Options Panel Mount, VESA 100 Mount

Peripheriegeräte und drahtlose Konnektivität

WiFi Optional WiFi

Bluetooth Optional Bluetooth 4.0

Gewicht / Abmessungen

Weight 4.5 kg (9.9 lbs)

Dimensions 410 x 310 x 54.7 mm (16.1 x 12.2 x 2.2 in)

Zertifizierung

Certifications CE, FCC, UL 62368

Garantie

Warranty


Up to 5 Years

I/O Diagram Images



- | | |
|------------------------------|-----------------------|
| A DC In | E LAN (x2) |
| B Audio Line Out | F USB 3.2 (x2) |
| C Remote Power Switch | G COM |
| D Display Port | H USB 2.0 (x2) |

Tech Diagram Images

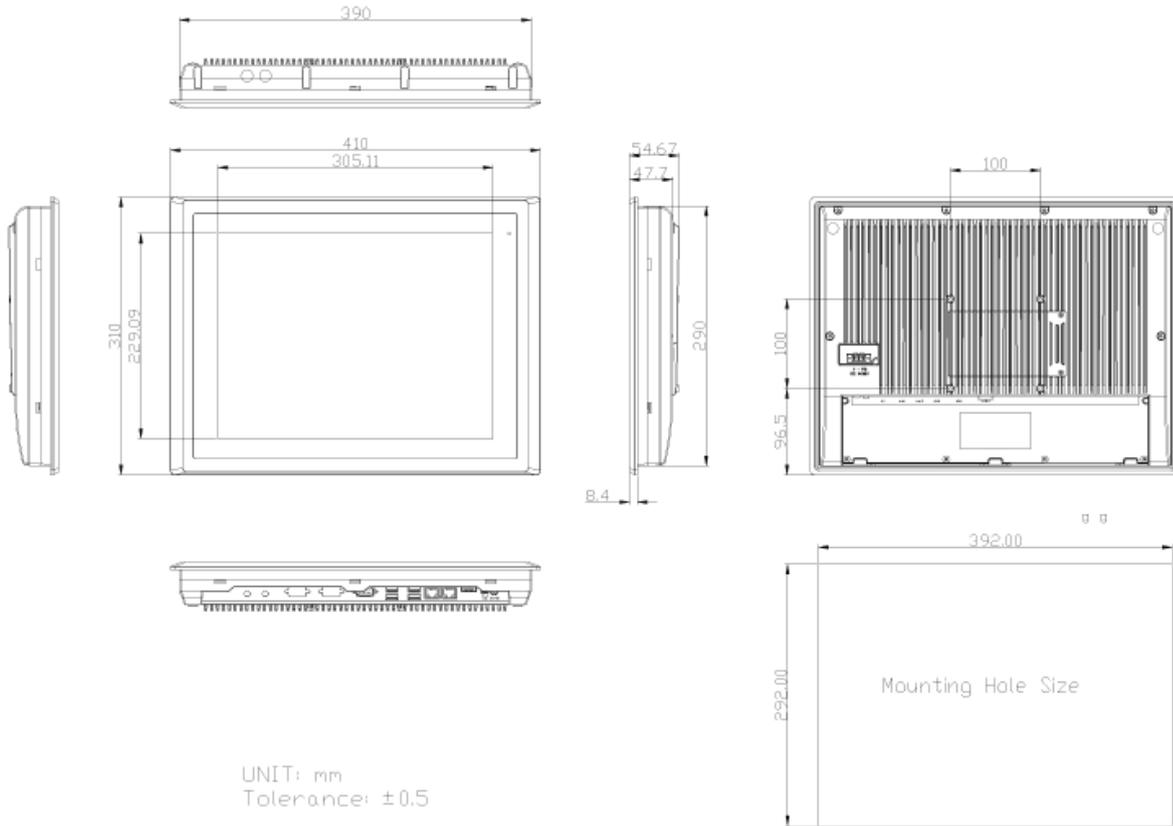

All specifications are subject to change without notice.