



Features

- 15.6" Flush LCD Touchscreen
- IP66/IP69K Fully Enclosed Fanless Design
- Resistive or Projected Capacitive Touchscreen
- HDMI and VGA Inputs
- Optional 1000 nit High Brightness and Optical Bonding
- Grade 304 Stainless Steel Enclosure

Technical Specifications

Display

Screen Size	15.6"
Screen Ratio	16:09
Brightness	350 nits, Optional 1000 nit High Brightness

Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

Externe E/A-Ports

USB	1x M12 USB
Power Input Port	M12 type 3-PIN DC-in

Leistung

Input Voltage Range	9-36V DC
Max Power Consumption	12.3W

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermisch & Umwelt

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Humidity Range	10% – 90% Non-condensing

Gehäuse

Material	Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66, IP69K
Control Buttons	On-Screen Display (OSD), Touchscreen Lock for Cleaning
Mounting Options	VESA 75 Mount, Yoke Mount
Approved Cleaning Solutions	Alcohol, Chlorine and Compounds, Glutaraldehyde, Hydrogen Peroxide, Ortho-phthalaldehyde (OPA), Quaternary Ammonium Compounds

Gewicht / Abmessungen

Weight	6.4 kg (14.1 lbs)
Dimensions	440 x 290 x 55 mm (17.3 x 11.4 x 2.2 in)

Zertifizierung

Certifications	CE, FCC Class A
----------------	-----------------


Garantie

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images



Tech Diagram Images

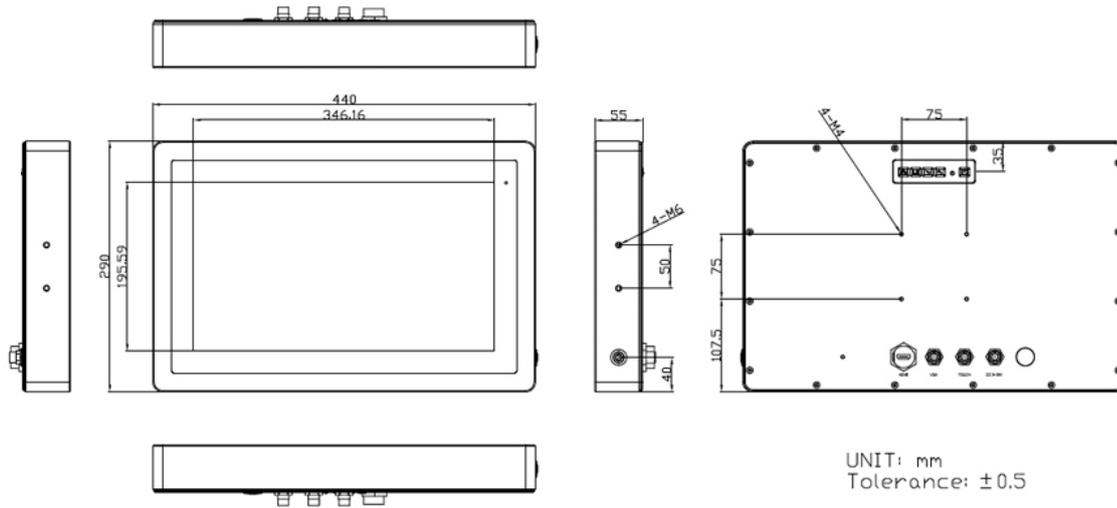

All specifications are subject to change without notice.