



Features

- Built in 300W Power Supply
- Six 202 group, 7800 mah batteries
- 3~3.5 hrs from 0% to 100%
- AT / Advanced Technology Power Switch
- US AC Power Cord

Technical Specifications

Power

Input Voltage Range	85-264V AC
Max Power Consumption	37.8W, 230.09W (Max Load on 230V AC), 239.88 W (Max Load on 110V AC)
Standard Power Adapter	C13 US AC Type B Power Cord, 300W Power Supply is built-into the Chassis

Thermal & Environmental

Operating Temperature	0°C - 40°C (32°F – 104°F)
Storage Temperature	-20°C - 60°C (-4°F – 140°F)
Cooling Solution	Active – with Fan
Humidity Range	20% – 90% Non-condensing
Storage Humidity	10%~95%, non-condensing

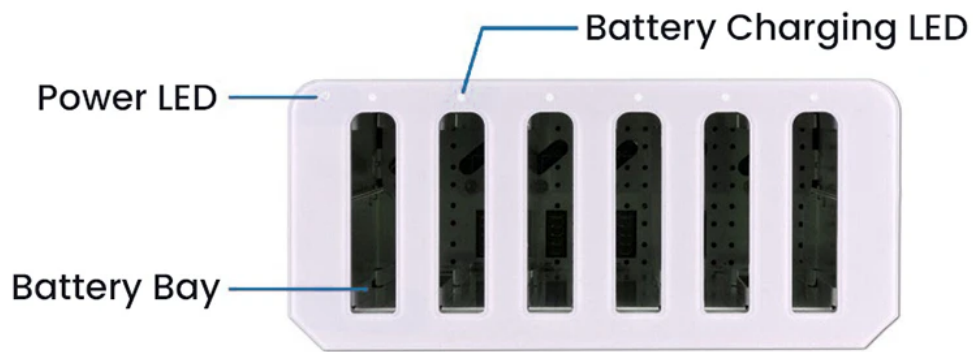
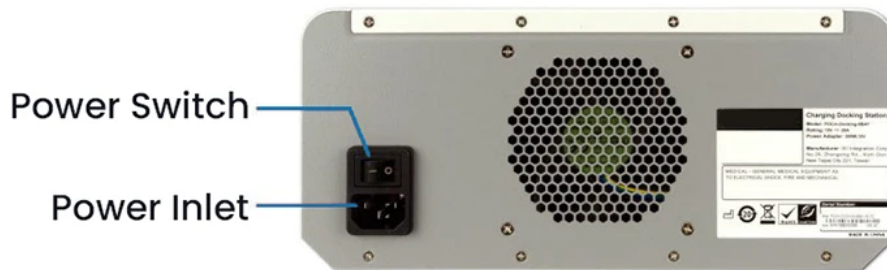
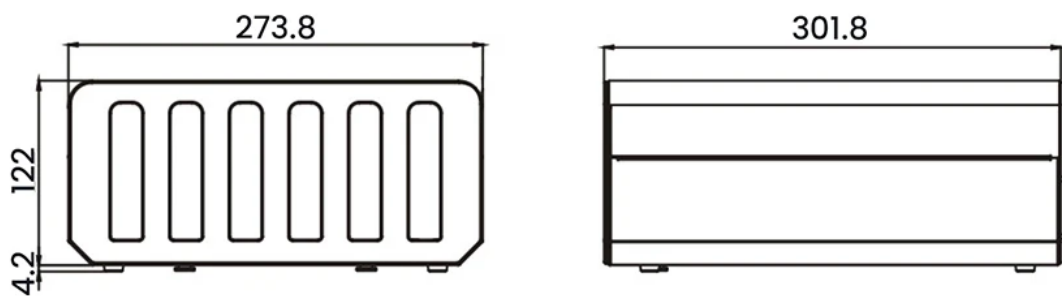
Enclosure

Material	Metal Housing
Color	White
Led Indicator Light	Battery, Power

Weight / Dimensions

Weight	0.8 kg (1.8 lbs)
Dimensions	273.8 x 122 x 301.8 mm (10.8 x 4.8 x 11.9 in)

I/O Diagram Images

Front Panel**Rear Panel****Tech Diagram Images****Dimensions (Unit: mm)**

All specifications are subject to change without notice.