



Features

- Built in 300W Power Supply
- Six 202 group, 7800 mah batteries
- 3~3.5 hrs from 0% to 100%
- AT / Advanced Technology Power Switch
- US AC Power Cord

Technical Specifications

Power

Input Voltage Range 85-264V AC

Max Power Consumption 37.8W, 230.09W (Max Load on 230V AC), 239.88 W (Max Load on

110V AC)

Standard Power Adapter C13 US AC Type B Power Cord, 300W Power Supply is built-into the

Chassis

Thermal & Environmental

Operating Temperature $0^{\circ}\text{C} - 40^{\circ}\text{C} (32^{\circ}\text{F} - 104^{\circ}\text{F})$ Storage Temperature $-20^{\circ}\text{C} - 60^{\circ}\text{C} (-4^{\circ}\text{F} - 140^{\circ}\text{F})$

Cooling Solution Active – with Fan

Humidity Range 20% – 90% Non-condensing Storage Humidity 10%~95%, non-condensing

Enclosure

Material Metal Housing

Color White

Led Indicator Light Battery, Power

Weight / Dimensions

Weight 0.8 kg (1.8 lbs)


Dimensions 273.8 x 122 x 301.8 mm (10.8 x 4.8 x 11.9 in)

I/O Diagram Images


Teguar Corporation Phone: +17-04-960-17 https://teguar.com sales@teguar.com



Front Panel

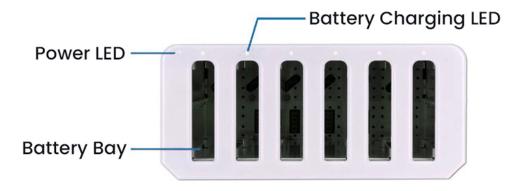



Rear Panel

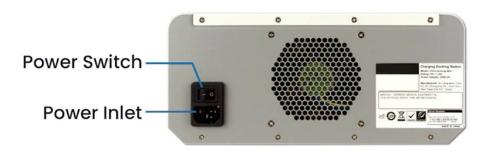

Tech Diagram Images

Dimensions (Unit: mm)





All specifications are subject to change without notice.

Teguar Corporation Phone: +17-04-960-17 https://teguar.com sales@teguar.com