



Features

- 12.1" LCD with 800×600 or 1024×768 Resolution
- Rugged Die Cast Aluminum Enclosure
- Full Flat Front Panel
- Resistive or Projected Capacitive Touchscreen
- Wide Range DC 9~36V Power Input

Technical Specifications

Display

Screen Size	12.1"
Screen Resolution	Optional 1024 x 768, 800 x 600 (SVGA)
Screen Ratio	4:03
Brightness	Optional 1000 nit High Brightness, 450 nits

Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

External I/O Ports

Audio Ports	1x Optional Line in by RCA Jack
Power Input Port	3-Pin DC-In (Phoenix Type)

Power

Input Voltage Range	9-32V DC
Max Power Consumption	7.9W (Resistive), 14.8W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermal & Environmental

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Enclosure

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA 100 Mount

Weight / Dimensions

Weight	2.7 kg (6.0 lbs)
Dimensions	319 x 245 x 51.6 mm (12.6 x 9.6 x 2.0 in)


Certification

Certifications	CE, FCC Class A
----------------	-----------------


Warranty

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images

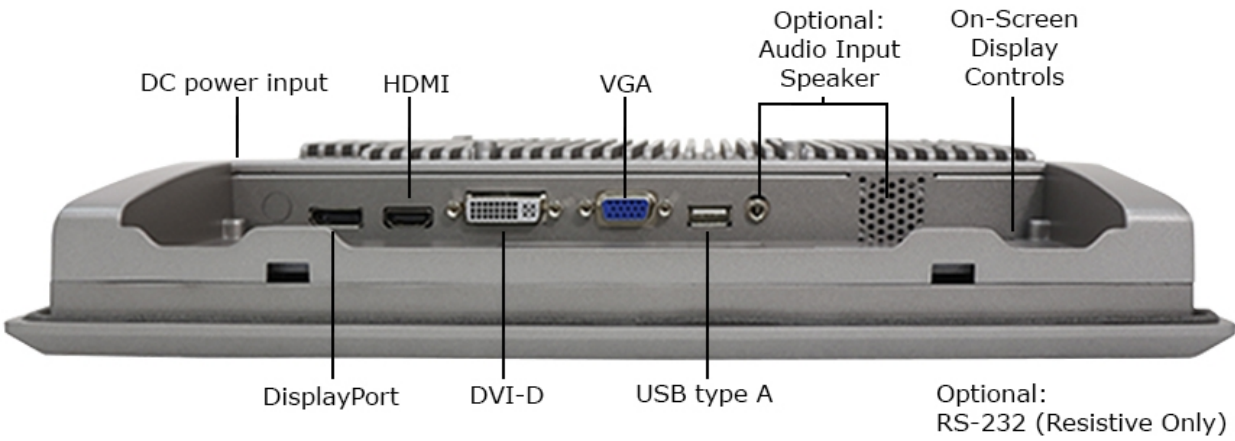

Tech Diagram Images

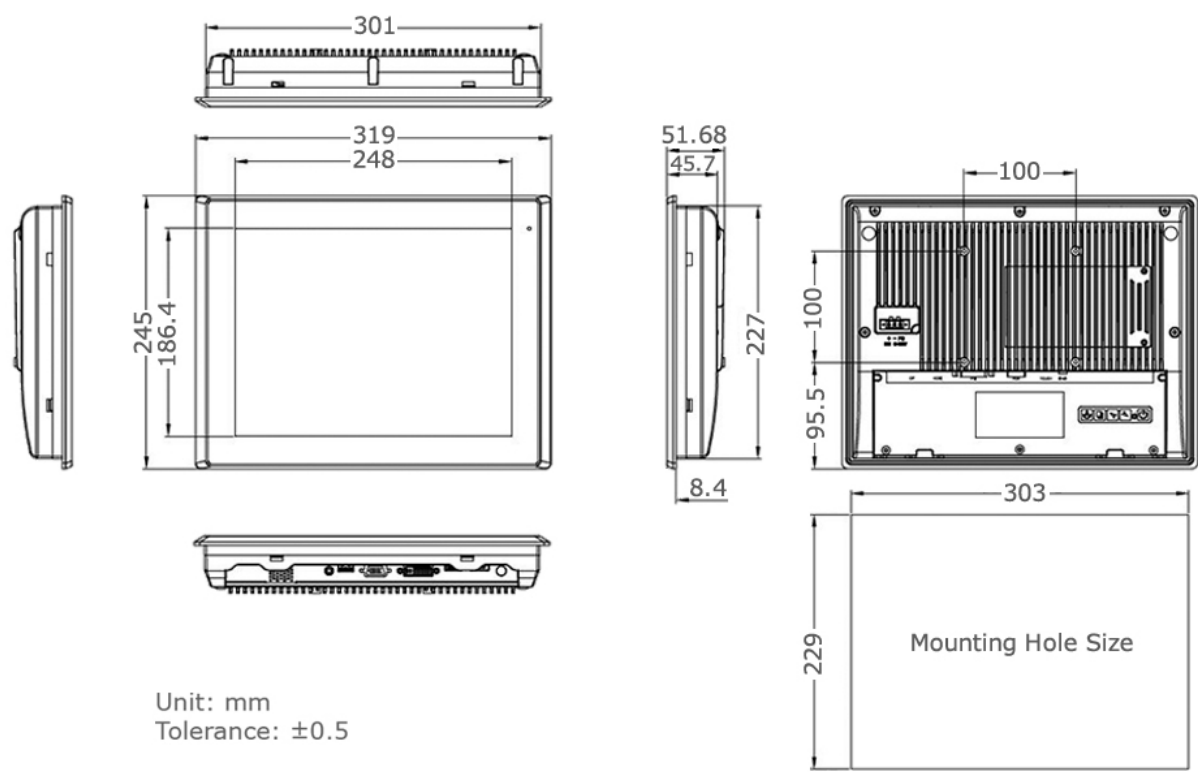

All specifications are subject to change without notice.