



Features

- 15" Touchscreen with Optional Sunlight Readable LCD
- Aluminum Chassis for Industrial Strength
- IP66 Compliant Front Panel
- Resistive or Projected Capacitive Touchscreen
- Wide Range DC 9~36V Power Input
- Full Flat Front Panel

Technical Specifications

Display

Screen Size	15"
Screen Resolution	1024 x 768 (XGA)
Screen Ratio	4:03
Brightness	Optional 1000 nit High Brightness, 420 nits

Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

External I/O Ports

Audio Ports	1x Optional Speaker with 1x Audio Input
Power Input Port	3-Pin DC-In (Phoenix Type)

Power

Input Voltage Range	9-32V DC
Max Power Consumption	12.5W (Resistive), 17.6W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermal & Environmental

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Enclosure

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA 100 Mount
Approved Cleaning Solutions	Alcohol, Chlorine and Compounds, Glutaraldehyde, Hydrogen Peroxide, Ortho-phthalaldehyde (OPA), Quaternary Ammonium Compounds

Weight / Dimensions

Weight	4.3 kg (9.5 lbs)
Dimensions	410 x 310 x 54.6 mm (16.1 x 12.2 x 2.1 in)


Certification

Certifications	CE, FCC Class A, UL 62368
----------------	---------------------------


Warranty

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images

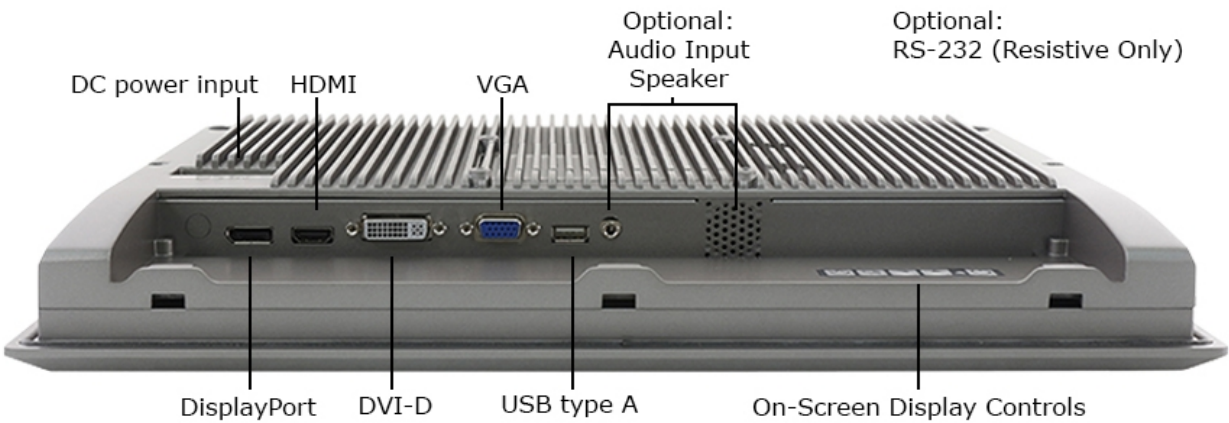

Tech Diagram Images

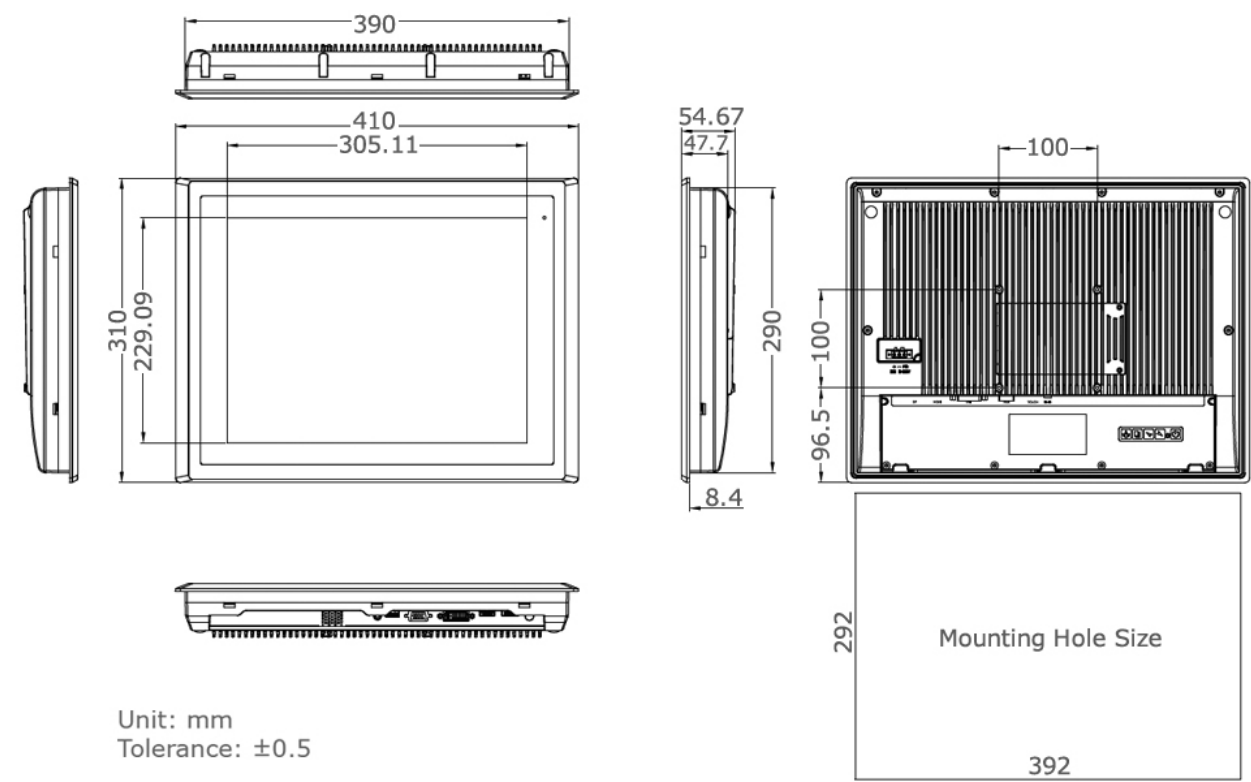

All specifications are subject to change without notice.