



## Features

- 17" LCD with 1280 x 1024 Resolution
- Die Cast Aluminum Chassis
- Optional High Brightness LCD and Auto Dimming
- Wide Range DC 9~36V Power Input
- Resistive or Projected Capacitive Touchscreen
- IP66 Compliant Front Panel

## Technical Specifications

### Display

|                   |                                             |
|-------------------|---------------------------------------------|
| Screen Size       | 17"                                         |
| Screen Resolution | 1280 x 1024 (SXGA)                          |
| Screen Ratio      | 5:04                                        |
| Brightness        | Optional 1000 nit High Brightness, 350 nits |

### Touch Screen

|              |                                 |
|--------------|---------------------------------|
| Touch Screen | Projected Capacitive, Resistive |
|--------------|---------------------------------|

### External I/O Ports

|                  |                                         |
|------------------|-----------------------------------------|
| Audio Ports      | 1x Optional Speaker with 1x Audio Input |
| Power Input Port | 3-Pin DC-In (Phoenix Type)              |

### Power

|                        |                                  |
|------------------------|----------------------------------|
| Input Voltage Range    | 9-32V DC                         |
| Max Power Consumption  | 11.6W (Resistive), 27.3W (P-Cap) |
| Standard Power Adapter | Optional 12V AC/DC Adapter       |

### Multimedia

|          |                  |
|----------|------------------|
| Speakers | Optional Speaker |
|----------|------------------|

### Thermal & Environmental

|                       |                              |
|-----------------------|------------------------------|
| Operating Temperature | -20°C - 60°C (-4°F – 140°F)  |
| Storage Temperature   | -30°C - 70°C (-22°F – 158°F) |
| Cooling Solution      | Passive – Fanless            |
| Storage Humidity      | 10% – 90% Non-condensing     |

Enclosure

|                             |                                                                                                                               |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Material                    | Aluminum                                                                                                                      |
| IP Rating                   | IP66 Front Bezel                                                                                                              |
| Color                       | Silver                                                                                                                        |
| Mounting Options            | Panel Mount, VESA 100 Mount                                                                                                   |
| Approved Cleaning Solutions | Alcohol, Chlorine and Compounds, Glutaraldehyde, Hydrogen Peroxide, Ortho-phthalaldehyde (OPA), Quaternary Ammonium Compounds |

Weight / Dimensions

|            |                                            |
|------------|--------------------------------------------|
| Weight     | 5.9 kg (13.0 lbs)                          |
| Dimensions | 439 x 348 x 64.8 mm (17.3 x 13.7 x 2.6 in) |


Certification

|                |                 |
|----------------|-----------------|
| Certifications | CE, FCC Class A |
|----------------|-----------------|


Warranty

|          |               |
|----------|---------------|
| Warranty | Up to 5 Years |
|----------|---------------|

I/O Diagram Images

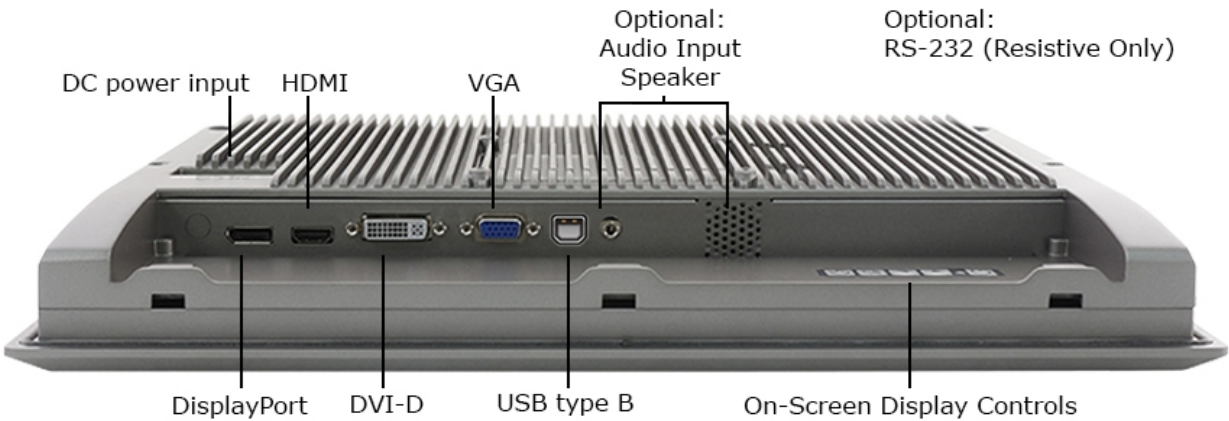

Tech Diagram Images

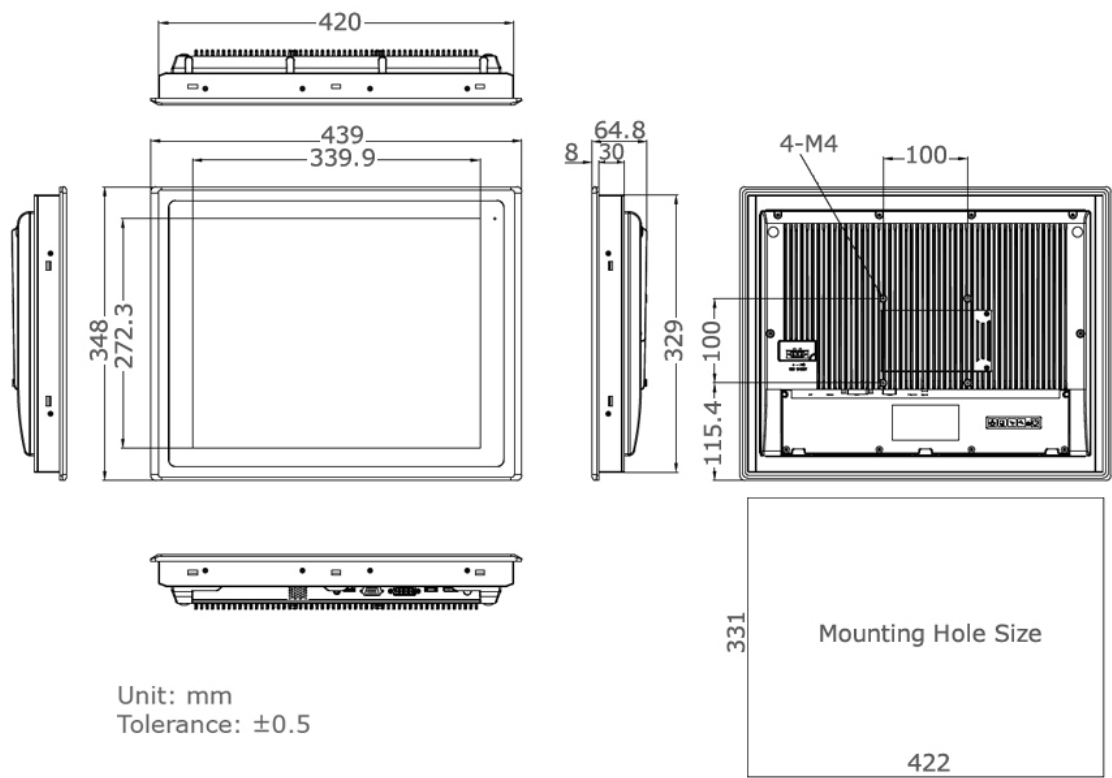

All specifications are subject to change without notice.