

# TM-7200-24

Clarion 23.8" Medical All-in-one PC




## Key Highlights

- Intel® Core™ Ultra processors
- 23.8" Full HD Optical Bonded Display
- Total IP65 Front Panel
- Wide range DC 9~36V Power Input
- PCAP Touch with Anti-Glare Etching
- Fanless, Slim, & Lightweight Design
- Optional Backup Battery Pack

Feel and interact with a seamlessly elegant user experience with TM-7200-24 Clarion. The optical bonded 10-point touch display provides brighter brights and crisper colors. Take advantage of Clarion's 14th Gen Processor and all of the benefits it brings: AI Accelerating NPU, 12-Core CPU for strong multitask computing, and maximum efficiency with high-speed DDR5. TEGUAR makes this cutting-edge power possible in a fanless unit.

## Inputs/Outputs

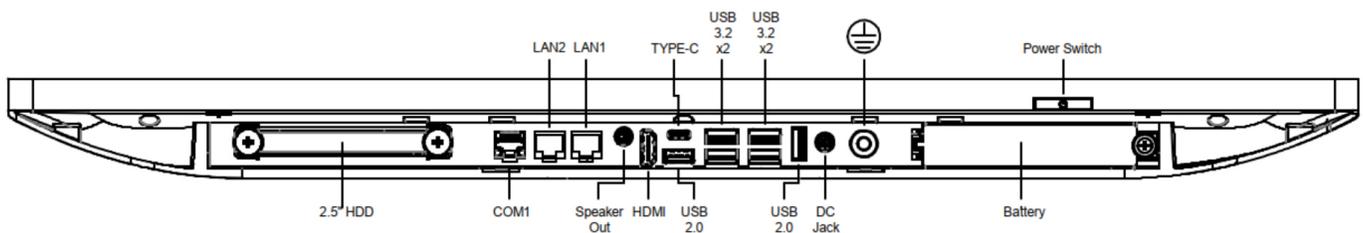

\*POAG is an optional item.

## Technical Specifications

<b>Primary Components</b>		<b>Power</b>	
Processor Model	Intel Core Ultra 125U, Core Ultra 7 155U	Input Voltage Range	9~36V DC
TDP	15W	Power Input	19V DC (standard power adapter: 4.74 Amp AC/DC)
Memory Type	1x 262-pin SO-DIMM	<b>Accessory</b>	
Memory Support	Up to 32GB DDR5	Accessory	Backup Battery Pack
Storage type	1x SATA-III, 1x M.2 M-Key 2280	<b>Operating Systems</b>	
Storage Support	128GB~1TB	Windows	Windows 10 IoT (64-bit) Windows 11 IoT (64-bit)
<b>Display</b>		<b>Enclosure</b>	
Screen Size	23.8" Optical Bonded Display	Ip Rating	Total IP65 Front Bezel
Resolution	1920 x 1080 Full HD	Mounting	VESA Mount 100 x 100
Screen Ratio	16:9	Enclosure	Die-Cast Aluminum / Plastic
Brightness	350 nits	<b>Peripherals &amp; Wireless Connectivity</b>	
<b>Expansion</b>		WiFi	Supported via M.2 E-Key 2230
Expansion	1x Mini PCIe (USB2.0, PCIe1) 1x M.2 E-Key 2230 for Wi-Fi/BT Module Potential Equalization Pin RFID	BlueTooth	Supported via M.2 E-Key 2230
<b>Other Specifications</b>		GPU	Intel Graphics for Ultra 5 125U (1.85 GHz) Intel Graphics for Ultra 7 155U (1.95 GHz)
Security	TPM 2.0	Camera	8MP Wide-angle front-facing Webcam
Certification	CE/FCC Class B, IEC 61010-1	<b>Dimensions / Weight</b>	
<b>Thermal and Environmental</b>		Weight	8kg
Operating Temperature	0°C - 40°C (32°F - 104°F)	Dimensions	581x350x44mm
Storage Temperature	-20°C - 60°C (-4°F - 140°F)	<b>Specs subject to change.</b>	
Humidity Range	90% Non-condensing		
Cooling Solution	Fanless		
<b>Touch Screen</b>			
Touch Screen	Projected Capacitive (Multitouch) with Anti-Glare Etching		
<b>External I/O ports</b>			
USB	1x USB-C, 4x USB 3.2, 3x USB 2.0		
Video Outputs	1x HDMI		
Serial	1x RS-232 by DB-9 Connector		
LAN	2x Intel 2.5G LAN, RJ45 Connectors		
Audio	2x 3W Speakers, 2x Built-in Microphones		
Power Input Port	1 x 1 x φ2.5 x 5.5 mm DC jack for power input		

### USA

Teguar International HQ  
Charlotte, NC  
+1 704-960-1761  
sales@teguar.com

### EUROPE

Teguar Europe AG  
Pfäffikon, Switzerland  
+41 41 561 53 11  
sales.EU@teguar.com

### ASIA

Teguar Taiwan Ltd.  
New Taipei City 221, Taiwan  
(R.O.C.) +886 2 7751 5319  
sales@teguar.com.tw