



Features

- 10.1" Flush LCD Touchscreen
- IP66/IP69K Fully Enclosed Fanless Design
- HDMI and VGA Inputs
- Grade 304 Stainless Steel Enclosure
- Resistive or Projected Capacitive Touchscreen
- M12 Metal I/O Connectors

Technical Specifications

Display

Screen Size	10.1"
Screen Resolution	1280 x 800 (WXGA)
Screen Ratio	16:10
Brightness	350 nits, Optional 1000 nit High Brightness

Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

External I/O Ports

USB	1x M12 USB
Audio Ports	1x Audio Line-Out
Power Input Port	M12 type 3-PIN DC-in

Power

Input Voltage Range	9-36V DC
---------------------	----------

Multimedia

Speakers	Optional Speaker
----------	------------------

Thermal & Environmental

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Humidity Range	10% – 90% Non-condensing

Enclosure

Material	Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66, IP69K
Control Buttons	On-Screen Display (OSD), Touchscreen Lock for Cleaning
Mounting Options	VESA 75 Mount, Wall Mount

Weight / Dimensions

Weight	3.6 kg (7.9 lbs)
Dimensions	300 x 220 x 53 mm (11.8 x 8.7 x 2.1 in)

Certification

Certifications	CE, FCC Class A
----------------	-----------------


Warranty

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images



Tech Diagram Images

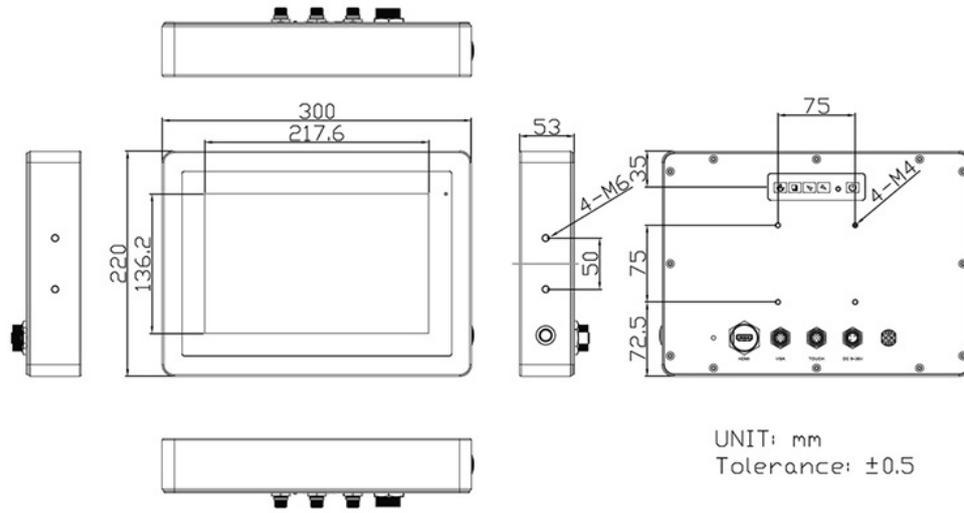

All specifications are subject to change without notice.