



## Features

- 17" Resistive or Projected Capacitive Touchscreen
- Full-Flush LCD Display
- IP66/IP69K Fully Enclosed Fanless Design
- Optional 1000 nit High Brightness and Optical Bonding
- M12 Metal I/O Connectors

## Technical Specifications

### Display

Screen Size	17"
Screen Resolution	1280 x 1024 (SXGA)
Screen Ratio	4:03
Brightness	350 nits, Optional 1000 nit High Brightness

### Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

### External I/O Ports

USB	1x M12 USB
Power Input Port	M12 type 3-PIN DC-in

### Power

Input Voltage Range	9-36V DC
Max Power Consumption	19W

### Multimedia

Speakers	Optional Speaker
----------	------------------

### Thermal & Environmental

Operating Temperature	-20°C - 60°C (-4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Humidity Range	10% – 90% Non-condensing

## Enclosure

Material	Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66, IP69K
Control Buttons	On-Screen Display (OSD), Touchscreen Lock for Cleaning
Mounting Options	VESA 75 Mount, Yoke Mount
Approved Cleaning Solutions	Acetone, Alcohol, Club Soda, Hydrochloric Acid, Methyl Alcohol, Mineral Spirits, Nitric Acid, Sulfuric Acid (low concentration), Vinegar, Warm Water

## Weight / Dimensions

Weight	7.5 kg (16.5 lbs)
Dimensions	432 x 358 x 55 mm (17.0 x 14.1 x 2.2 in)


## Certification

Certifications	CE, FCC Class A
----------------	-----------------


## Warranty

Warranty	Up to 5 Years
----------	---------------

### I/O Diagram Images

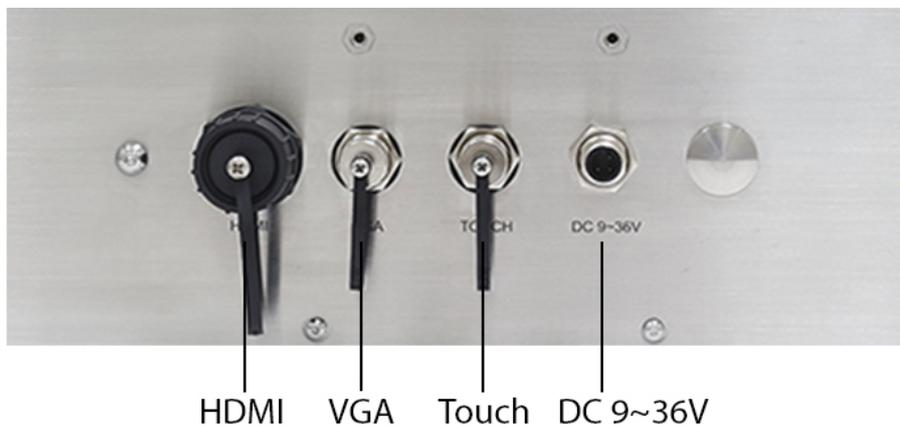

### Tech Diagram Images

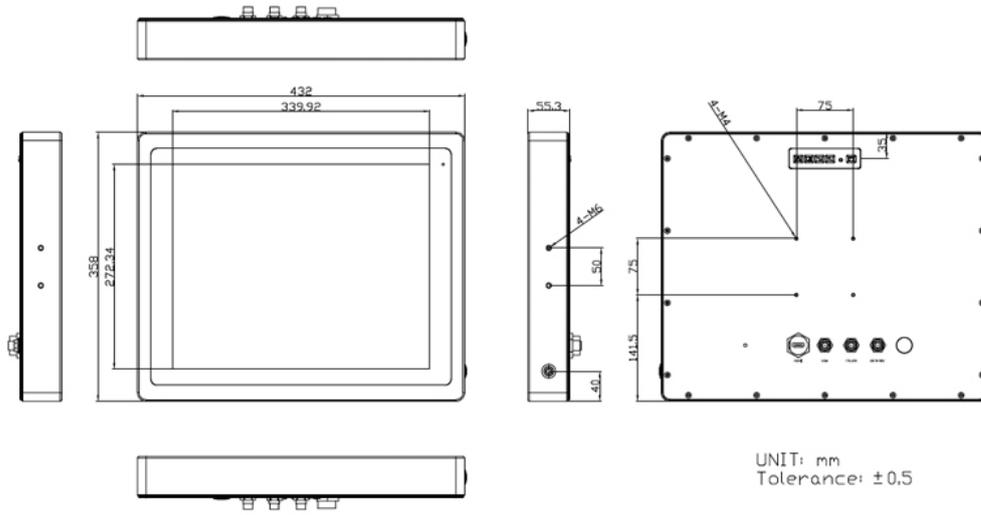

*All specifications are subject to change without notice.*