



## Features

- 23.8" Projected Capacitive Touchscreen
- Full-Flush LCD Display
- IP66/IP69K Fully Enclosed Fanless Design
- Optional 1000 nit High Brightness and Optical Bonding
- Grade 304 Stainless Steel Enclosure
- M12 Metal I/O Connectors

## Technical Specifications

### Display

Screen Size	23.8"
Screen Resolution	1920 x 1080 (Full HD)
Screen Ratio	16:09
Brightness	250 nits, Optional 1000 nit High Brightness

### Touch Screen

Touch Screen	Projected Capacitive
--------------	----------------------

### External I/O Ports

USB	1x M12 USB
Power Input Port	M12 type 3-PIN DC-in

### Power

Input Voltage Range	9-36V DC
Max Power Consumption	32W

### Multimedia

Speakers	Optional Speaker
----------	------------------

### Thermal & Environmental

Operating Temperature	0°C - 50°C (32°F – 122°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Humidity Range	10% – 90% Non-condensing

## Enclosure

Material	Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66, IP69K
Control Buttons	On-Screen Display (OSD), Touchscreen Lock for Cleaning
Mounting Options	VESA Mount, Yoke Mount

## Weight / Dimensions

Weight	12.6 kg (27.8 lbs)
Dimensions	656 x 423 x 53 mm (25.8 x 16.7 x 2.1 in)


## Certification

Certifications	CE, FCC Class A
----------------	-----------------


## Warranty

Warranty	Up to 5 Years
----------	---------------

### I/O Diagram Images

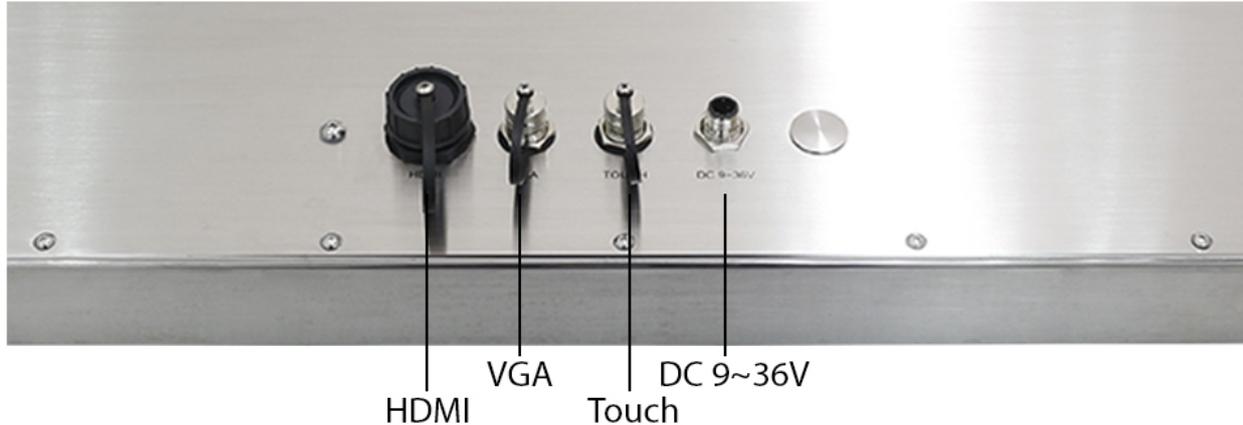

### Tech Diagram Images

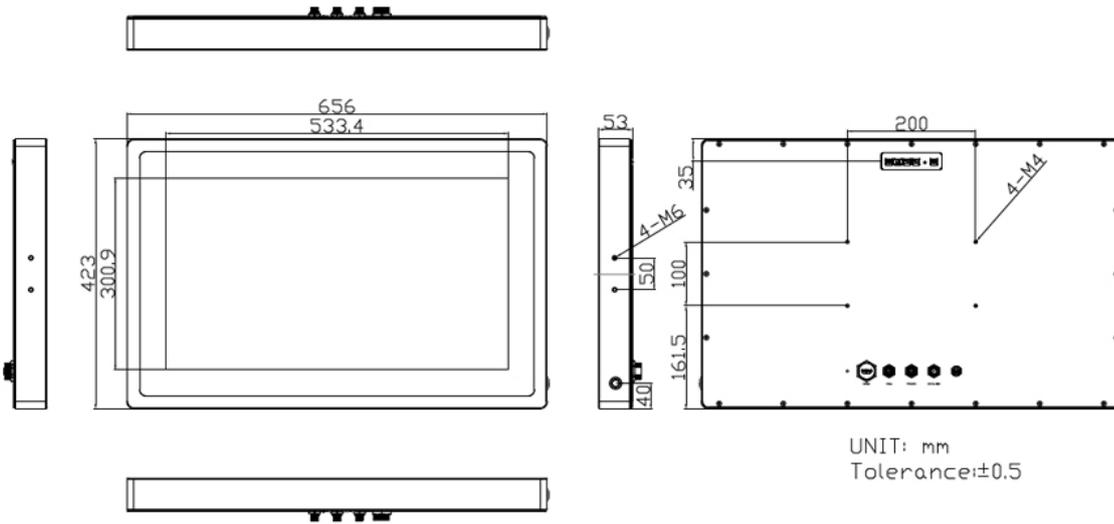

*All specifications are subject to change without notice.*