



Features

- 17" Resistive or Projected Capacitive Touchscreen
- Intel Celeron N2930 Processor
- 304 Stainless Steel Front Bezel (Optional 316)
- Aluminum Back Cover and Fanless Design
- Wide Range DC 9~36V Power Input

Technical Specifications

Primary Components

Processor Family	Intel Celeron Bay Trail
Processor Model	N2930
Processor Speed	1.83 GHz
Memory Type	Onboard DDR3
Memory Support	4GB
Storage Type	1x 2.5" SATA Drive Bay for SSD/HDD (easily accessible)
Storage Support	32GB-1TB

Display

Screen Size	17"
Screen Resolution	1280 x 1024 (SXGA)
Screen Ratio	5:4
Brightness	Optional 1000 nit High Brightness, 350 nits

Touch Screen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

External I/O Ports

USB	2x USB 3.0
Serial / Com	2x COM
Serial Protocol Detail	1x RS-232/422/485 DB-9, default RS-232(COM1), 1x RS-232 DB-9(COM2)
Ethernet / LAN	2x RJ45 GbE LAN
Video Outputs	1x Optional HDMI
Audio Ports	1x Audio Line-Out
Power Input Port	3-Pin DC-In (Phoenix Type)

Power

Input Voltage Range	9-36V DC
Max Power Consumption	23W
Standard Power Adapter	Optional 12V AC/DC Adapter

Operating Systems

Windows	Windows 10 IoT, Windows 10 Pro, Windows 7 Pro, Windows 8.1 Pro
---------	--

Thermal & Environmental

Operating Temperature	0°C - 50°C (32°F – 122°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Enclosure

Material	Aluminum, Optional SUS316 Stainless Steel, SUS304 Stainless Steel
IP Rating	IP66 Front Bezel, IP69K Front Bezel
Mounting Options	Panel Mount, VESA 100 Mount
Approved Cleaning Solutions	Acetone, Alcohol, Club Soda, Hydrochloric Acid, Methyl Alcohol, Mineral Spirits, Nitric Acid, Sulfuric Acid (low concentration), Vinegar, Warm Water

Weight / Dimensions

Weight	5.1 kg (11.2 lbs)
Dimensions	449 x 358 x 63.8 mm (17.7 x 14.1 x 2.5 in)

Certification

Certifications	CE, FCC Class A
----------------	-----------------


Warranty

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images



Tech Diagram Images

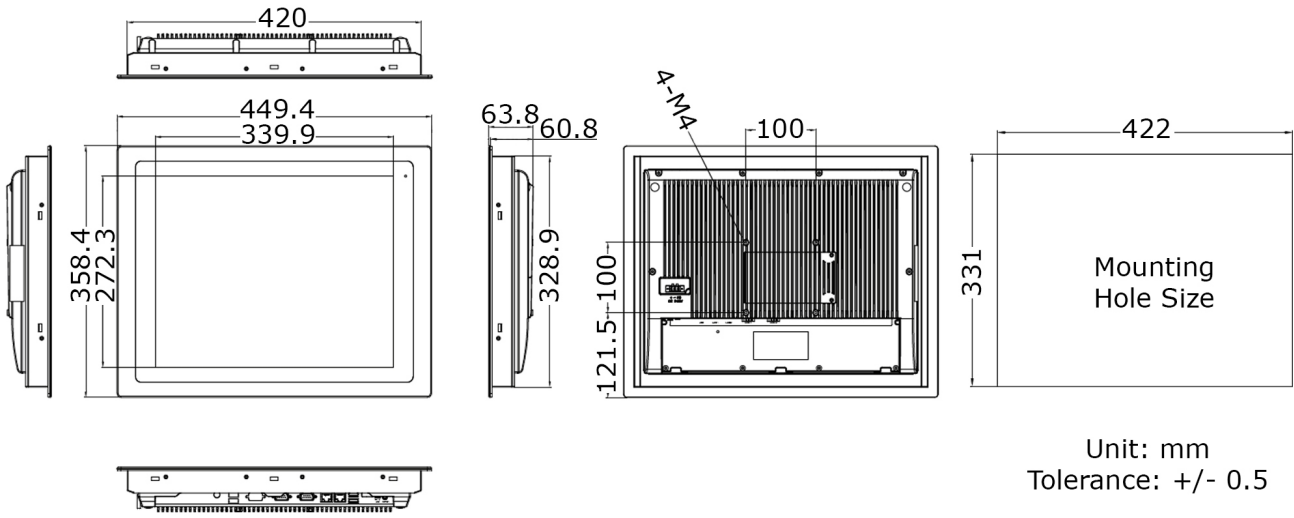

All specifications are subject to change without notice.