



Features

- 8" LCD with 800 x 600 Resolution
- Rugged Die Cast Aluminum Chassis
- IP66 Compliant Front Panel
- Optional Optical Bonding
- Resistive or Projected Capacitive Touchscreen
- Full Flat Front Panel

Technical Specifications

Display

Screen Size	8"
Screen Ratio	4:03
Brightness	350 nits, Optional 1000 nit High Brightness

Touchscreen

Touch Screen	Projected Capacitive, Resistive
--------------	---------------------------------

Externe E/A-Ports

Audio Ports	1x 3.5mm Audio Line-Out
Power Input Port	3-Pin DC-In (Phoenix Type)

Leistung

Input Voltage Range	9-32V DC
Max Power Consumption	4.7W (Resistive), 3.6W (P-Cap)
Standard Power Adapter	Optional 12V AC/DC Adapter

Thermisch & Umwelt

Operating Temperature	0°C - 50°C (32°F – 122°F), -20°C - 60°C (Optional -4°F – 140°F)
Storage Temperature	-30°C - 70°C (-22°F – 158°F)
Cooling Solution	Passive – Fanless
Storage Humidity	10% – 90% Non-condensing

Gehäuse

Material	Aluminum
IP Rating	IP66 Front Bezel
Color	Silver
Mounting Options	Panel Mount, VESA Mount
Approved Cleaning Solutions	Acetone, Alcohol, Club Soda, Hydrochloric Acid, Methyl Alcohol, Mineral Spirits, Nitric Acid, Sulfuric Acid (low concentration), Vinegar, Warm Water

Gewicht / Abmessungen

Weight	1.8 kg (4.0 lbs)
Dimensions	231.1 x 176.1 x 50 mm (9.1 x 6.9 x 2.0 in)


Zertifizierung

Certifications	CE, FCC Class A
----------------	-----------------


Garantie

Warranty	Up to 5 Years
----------	---------------

I/O Diagram Images

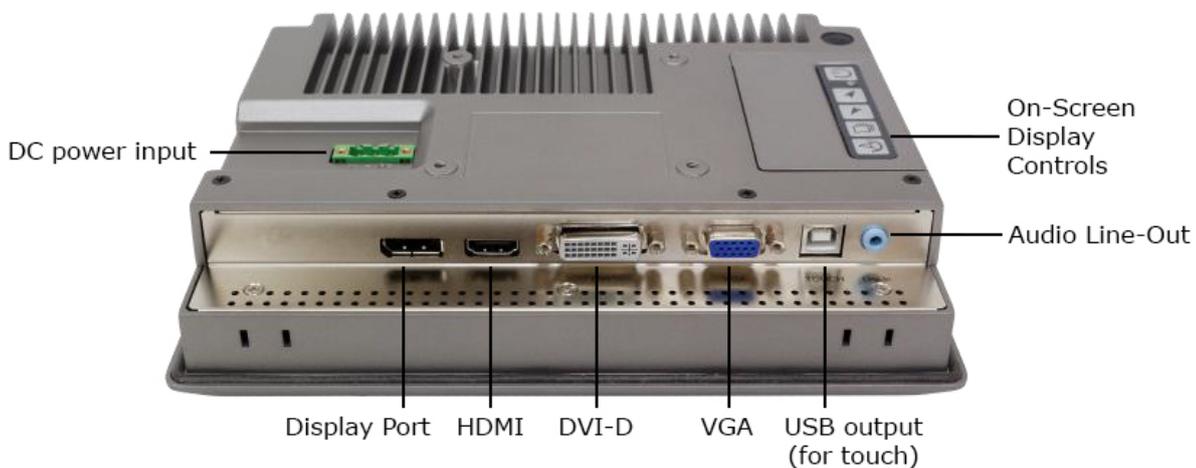

Tech Diagram Images

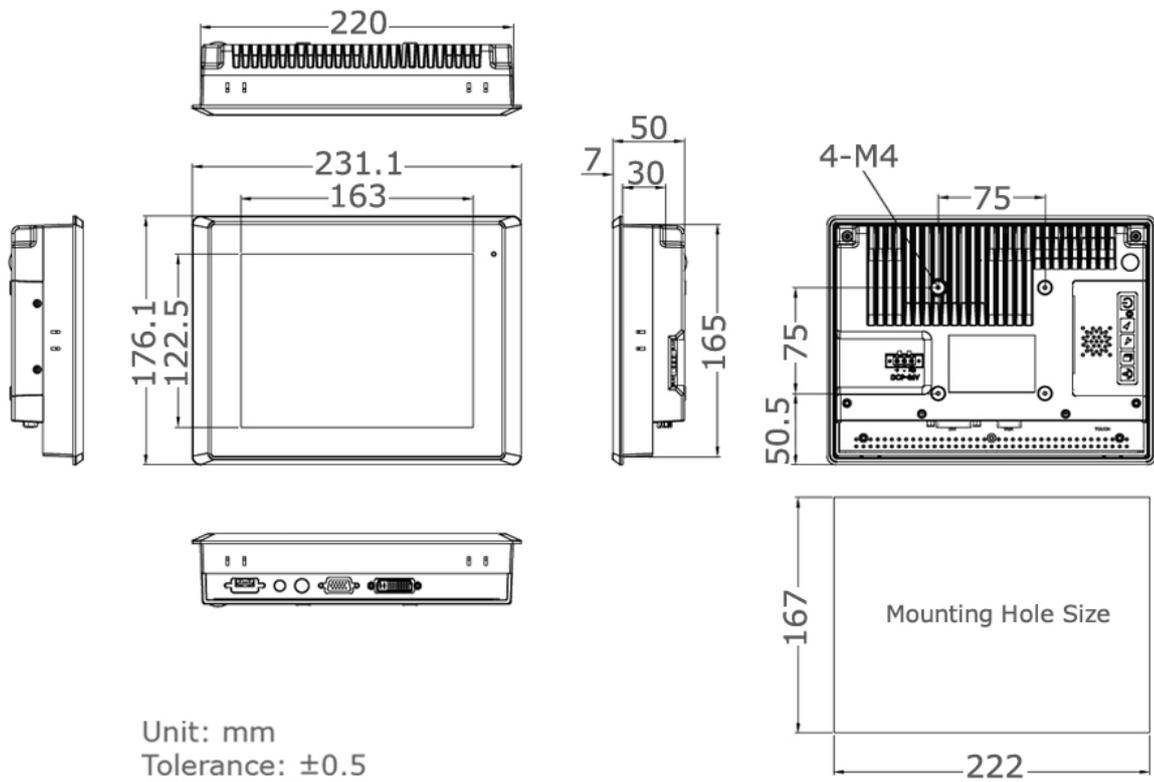

Unit: mm
Tolerance: ±0.5

All specifications are subject to change without notice.